

## **INSTALLATION INSTRUCTIONS:**

Note the cable routing detailed in Image 1, Detail A.

Insert the connector from the Protective Case into the Apple iPad Pro 11, maintaining the orientation shown in Detail

Place the iPad Pro into the Rear Protective Case and ensure that the cable routing matches that shown in Detail A. Be careful not to pinch the cable.

Place Front Protective Case onto the rear, noting that the Havis logo should be positioned on the bottom side (connector side) of the iPad Pro. Ensure that the cable is not pinched when placing the two halves together.

Your Protective Case includes four (4) snap fits located in the areas circled in Image 2. Apply light pressure until all the snaps are interlocked.

Holding the two pieces together, carefully turn the Protective Case over.

Fasten all eight (8) of the M2.5 x 6mm screws (Item #1) with the supplied T8 torx bit (Item #2) into the locations shown in Image 3. Torque to 4 in-lbs +/- 10%. Do not over-tighten screws.


NOTE: Hardware kit includes extra screws in the event of loss or damage.

NOTE: Protective case will allow for storage and charging of compatible Apple Pencil in location noted in Image 4.

	PRODUCT I.D.	DATE	
	TC-110	11-19-2020	
	PRODUCT NAME		_
	INSTALLATION INSTRUCTIONS FOR TC-110		A
	HAVIS	WEIGHT: (LBS) -	
		REV. DATE	
	1-800-524-9900 WWW.HAVIS.COM	11-19-2020	
0		F-730-019 REV A	

D

С

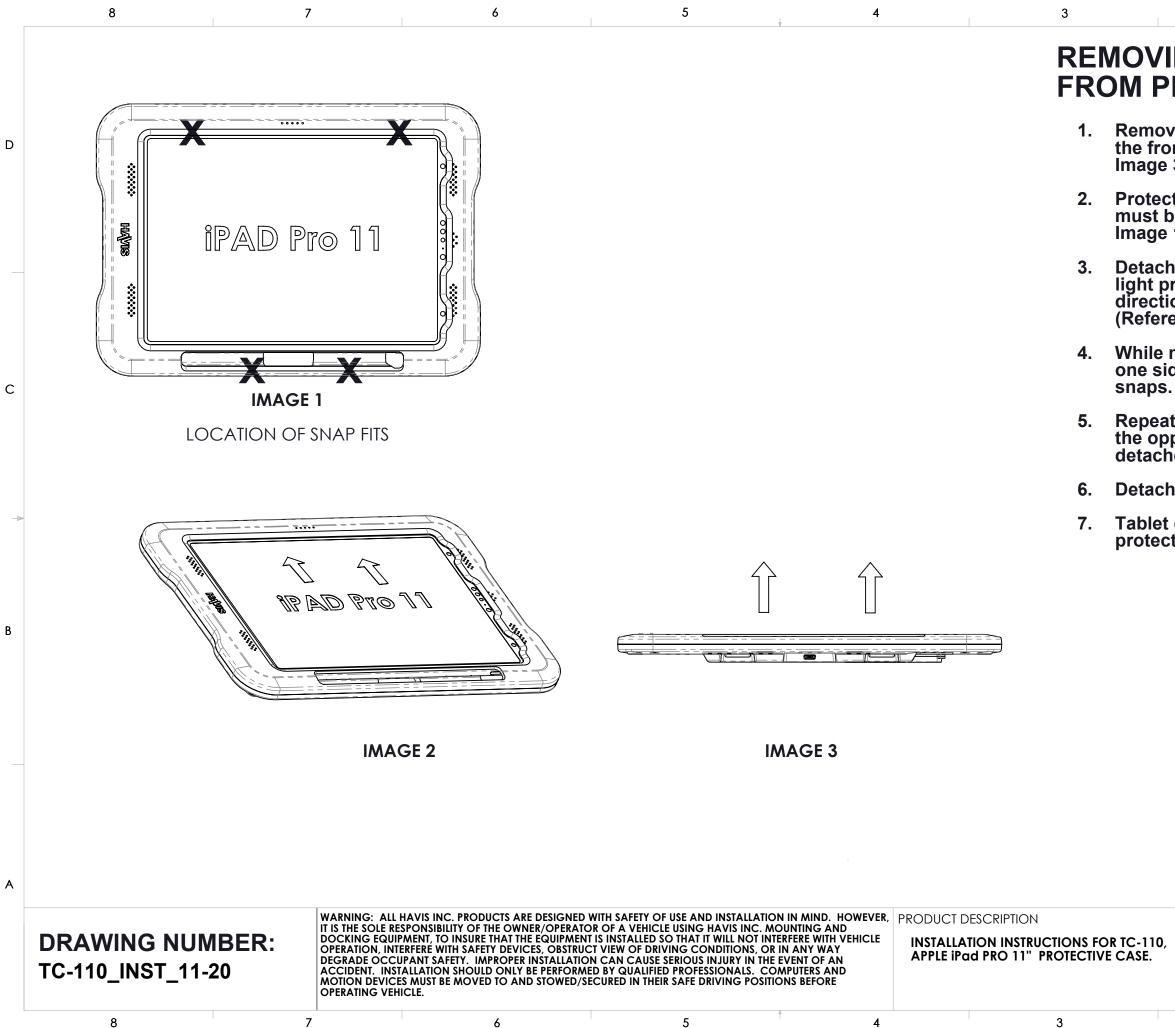

## REMOVING TABLET FROM PROTECTIVE CASE:

Remove all eight (8) of the screws that secure the front and back case together. Reference Image 3 of the installation instructions.

D

С

Protective case contains four snap fits that must be detached to remove the front case. Image 1 shows the locations of the snap fits.

Detach the snap fits on one side first applying light pressure on the snap fit locations in the directions indicated to detach the snaps (Reference Image 2).

While maintaining light pressure lift up the one side of the case to completely detach the snaps.

Repeat steps 3 and 4 to release the snaps on the opposite side. Once snap fits are detached you can then remove the front case.

Detach the connector from the tablet.

Tablet can now be removed from the protective case.



F-730-019 REV A

2