

Basic Rack PDU


Overview

The American Power Conversion[®] Basic Rack PDU distributes power to devices in the rack.

Outlets. The Rack PDU has twenty (20) IEC-320-C13 outlets, and four (4) IEC-320-C19 outlets.

Power cord. The 3-foot (0.91-meter) power cord terminates with a IEC-309 16 A connector.

AP7551

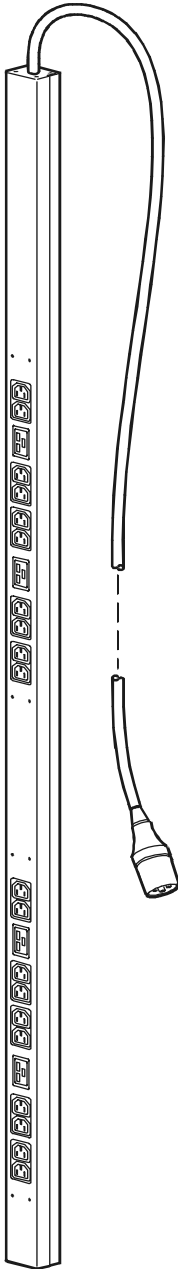

Specifications for AP7551

Electrical

Input connector	IEC-309 16 A plug
Output connectors	(20) IEC-320-C13, (4) IEC-320-C19 outlets
Nominal input voltage	230 VAC
Acceptable input voltage	± 10% of normal voltage
Input frequency	47–63 Hz
Cord length	0.91 m (3 ft)

Physical

(H × W × D)	161.92 × 5.56 × 4.39 cm (63.75 × 2.19 × 1.73 in)
Shipping dimensions (H × W × D)	213.36 × 15.24 × 12.7 cm (84.00 × 6.00 × 5.00 in)
Weight	5.56 kg (12.25 lb)
Shipping weight	6.46 kg (14.25 lb)

Environmental

Maximum elevation (above MSL)	
Operating	15 000 ft (4500 m)
Storage	50 000 ft (15 000 m)
Temperature	
Operating	–5 to 45° C (23 to 115° F)
Storage	–25 to 65° C (–13 to 149° F)
Humidity	
Operating	5–95% RH non-condensing
Storage	5–95% RH non-condensing

Compliance

Safety verification	VDE 0805, CE, EN 60950, IEC 60950
---------------------	--------------------------------------

