

GCS52DP

2-Port USB DisplayPort Cable KVM Switch



- Switch between 2 DisplayPort computers
- Connect only 1 keyboard, 1 mouse and 1 monitor
- No bells and whistles, just simple and robust computer switching
- No additional cables needed
- Self-explanatory installation and operation

DisplayPort KVM - Switch Between 2 DisplayPort Computers

Easily switch between your two DisplayPort computers and control them with one monitor, one keyboard and one mouse. IOGEAR's 2-Port USB Cable DisplayPort KVM Switch comes ready with built-in cables and is USB powered. Don't spend the extra money on features you don't need; this KVM offers the most efficient and affordable way to switch between your two DisplayPort computers. Hide the KVM anywhere and use the 6 ft. cable remote push-button to switch between the two connected computers.


Optimal Resolution to Get Things Done

Experience incredible high-definition resolutions up to 4K resolutions 4096 x 2160 @ 30Hz with this simple, yet robust cable KVM. The 2-Port USB DisplayPort Cable KVM Switch is designed with DisplayPort 1.1* technology, perfect for those who need to get the job done in the office, at home and at school.

- | | |
|---|---|
| <ul style="list-style-type: none"> • DisplayPort computer switch • Switch between 2 DisplayPort computers from a single keyboard, mouse, and DisplayPort1.1 monitor • Cinema 4K resolution up to 4096 x 2160 @ 30Hz • DisplayPort1.1 and HDCP compliant | <ul style="list-style-type: none"> • Computer switching via remote switch button • Built-in cables • Plug-n-Play • Expand USB ports by adding a USB hub • Bus powered* • Supports 7.1 HD audio • Supports 2.1 analog audio |
|---|---|

*may require external power supply via micro USB port



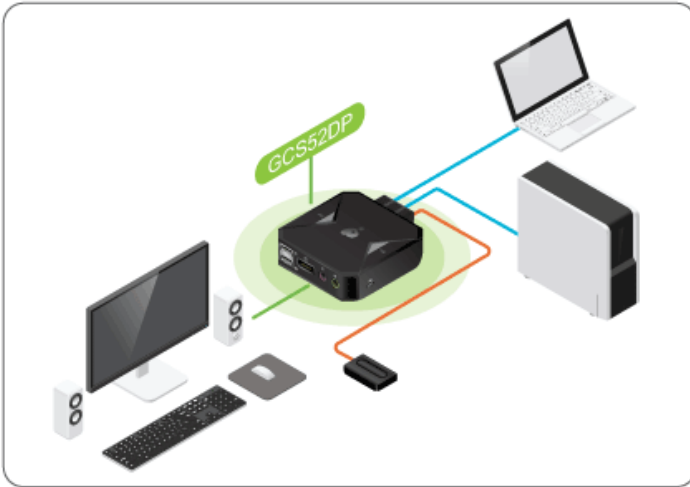

Requirements

Package Contents

- **Console**
- DisplayPort monitor
- Standard 104-key wired USB keyboard
- Standard 2 or 3 button wired USB mouse
- Speakers and Microphones (optional)
- **Computers**
- DisplayPort port
- USB Type-A port
- Audio ports (optional)
- **Operating Systems**
- Windows[®]7, 8.1, 10
- Mac OS X 9.0+
- Oracle[®] Solaris
- Linux[®], UNIX, and other USB supported systems
- 1 x GCS52DP
- DisplayPort KVM
- 1 x Manual

Specifications

Function	GCS52DP	Dimensions	GCS52DP
Computer Connections		Unit Dimensions	
Direct	2	Height	3.375" (8.57cm)
Port Selection	Remote Pushbutton (6ft)	Depth	1.06" (2.69cm)
Console Connectors		Length	3.25" (8.27cm); KVM cables: 48" (121.92cm); Remote Switch: 72" (182.88cm)
Monitor	1 x DisplayPort	Unit Package Dimensions	
Keyboard	1 x USB Type A	Width	6.125" (15.56cm)
Mouse	1 x USB Type A	Height	8.875" (22.5cm)
Audio	1 x 3.5mm Mini Stereo Jack (Green)	Depth	2.18" (5.54cm)
Microphone	1 x 3.5mm Mini Stereo Jack (Pink)	Master Carton	
CPU Connectors		Width	15.25" (38.74cm)
Monitor	2 x DisplayPort	Height	6.75" (17.15cm)
Keyboard & Mouse	2 x USB 2.0 Type A	Depth	8" (20.3cm)
Audio	2 x 3.5mm Mini Stereo Jack	Master Carton Qty.	6
Microphone	2 x 3.5mm Mini Stereo Jack	Weight	
Connectors		Master Carton Wt.	7.55lb (3.44kg)
USB	1 x USB 2.0 Mouse Port	Unit Pack Wt.	0.90lb (0.41kg)
LEDs		Unit Wt.	0.90lb (0.41kg)
KVM	2 x White		
Emulation			
Keyboard	N/A		
Mouse	N/A		
Video Resolution			
	up to 4096 x 2160 @30Hz		
Environment			
Operation Temperature	0-50C		
Storage Temperature	-20-60C		
Humidity	0-80% RH, Non-condensing		
Housing			
Case	Plastic		
Cable Length			
	KVM cables: 48" (121.92cm); Remote Switch: 72" (182.88cm)		
Power Consumption			
	DC 5V, 6.5W		