

GSR205

USB-C CAC Reader (TAA compliant)

- USB-C CAC (Smart Card) Reader
- Ideal for government, military, healthcare or banking
- Secured access to restricted networks
- Minimized misalignment errors
- PIV compatible



USB-C CAC Reader / Smart Card Reader

The IOGEAR USB-C CAC Reader is a TAA compliant USB Common Access Card Reader for military, government and private sector workers who need everyday access to secure systems. Common Access Card (CAC) or Smart Card readers are used as a communications medium between the Smart Card and a host (e.g. a computer, point-of-sale terminal, network system, etc.) in secure systems such as those used by government, banking and health care.

USB-C Connectivity

USB-C is quickly becoming the USB standard with an easy to use reversible cable. IOGEAR's USB-C Card Reader uses the latest USB-C technology to keep up with technology demands and replaces the legacy USB Type-A standard. The USB-C CAC Reader provides super fast transfer speed for your CAC and PIV cards to authenticating you to your classified network and complete your critical mission in a breeze.


- Ideal for government, military, healthcare or banking
- Portable design with power and scan LED indicators
- Fast 825kbps read speed with multi-protocol support**
- ISO7816 implementation-Class A, B and C (5V,3V,1.8V) card
- EMV2000 Level 1 approved and supports 3V & 5V cards

- CAC compatible for use with CAC card software
- Supports PIV cards
- TAA compliant

* CAC Middleware is not included

** Software driver may be needed to achieve maximum speed. Actual speed may be dependent on system environments.



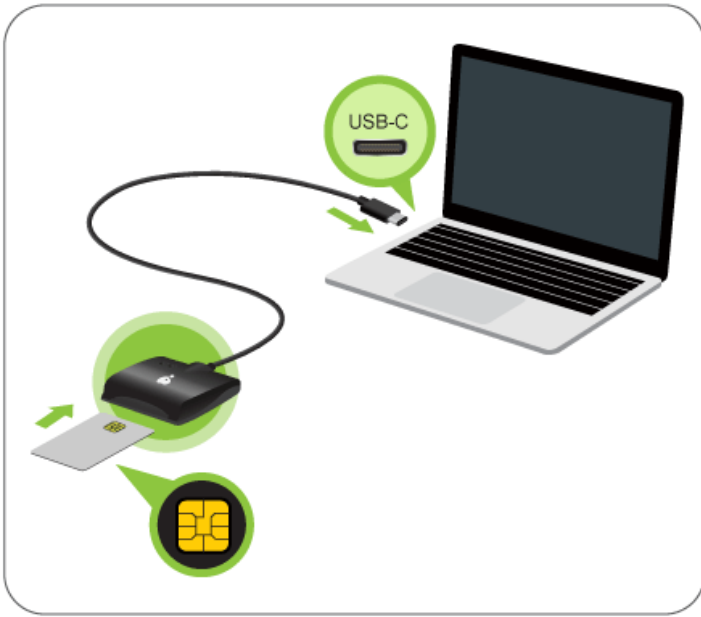

Requirements

Package Contents

-
- Windows® 7, Windows® 8.1, Windows® 10
 - MAC OS X 10.4 or later (32-bit/64-bit, embedded smart card services)
 - Linux Redhat, Ubuntu, Fedora (Kernel 2.4 or later)
 - USB-C Enabled computers
 - Thunderbolt 3 compatible
- 1 x USB-C Smart Card Reader
 - 1 x Quick Start Guide
 - 1 x Warranty Card

Specifications

| Function | GSR205 | Dimensions | GSR205 |
|--------------|--------------|--------------------------------|--------------------|
| LEDs | | POP Information | |
| Power On | 1 | 10" Peg Hook | 5 |
| Interface | USB-C | 6" Peg Hook | 3 |
| Cable Length | 25" (63.8cm) | Unit Dimensions | |
| | | Height | 3.06 in (7.77 cm) |
| | | Depth | 0.625 in (1.59 cm) |
| | | Length | 2.625 in (6.67 cm) |
| | | Unit Package Dimensions | |
| | | Width | 5.56 in (14.12 cm) |
| | | Height | 6.88 in (17.48 cm) |
| | | Depth | 1.38 in (3.51 cm) |
| | | Master Carton | |
| | | Width | 17 in (43.18 cm) |
| | | Height | 7.25 in (18.41 cm) |
| | | Depth | 6 in (15.24 cm) |
| | | Master Carton Qty. | 12 |
| | | Weight | |
| | | Master Carton Wt. | 3.80 lb (1.4kgs) |
| | | Unit Wt. | 0.20 lb (0.1kgs) |
| | | Physical Properties | |
| | | Unit Weight with package | 0.30 lb (0.14kgs) |