



Overview

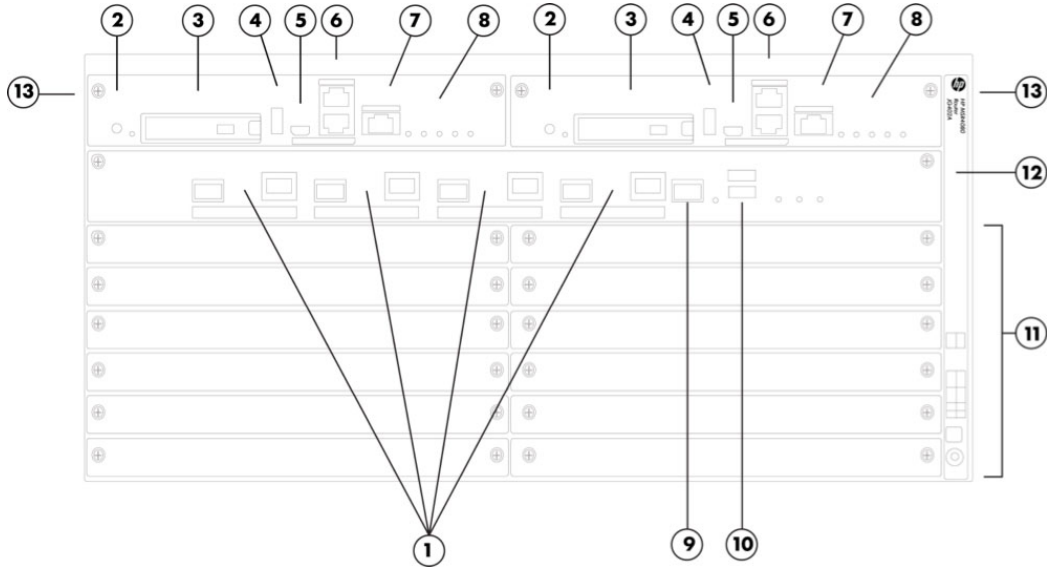

HP MSR4080 Router Chassis (SPU-200) - Front View

- | | |
|---------------------------------------|---|
| 1. 4 Fixed COMBO 1000M RJ45/SFP ports | 8. System Activity LEDs |
| 2. Reset Button | 9. SFP+ port |
| 3. CF Card Slot | 10. 2 USB 2.0 Port for 3G modem and USB disk |
| 4. USB Port | 11. 8-HMIM modules slot (4 Half Height + 4 Full Height Slots) |
| 5. USB console port | 12. Service Processing Unit (SPU) |
| 6. CON/AUX port | 13. Main Processing Units (MPU) |
| 7. Management Port | |

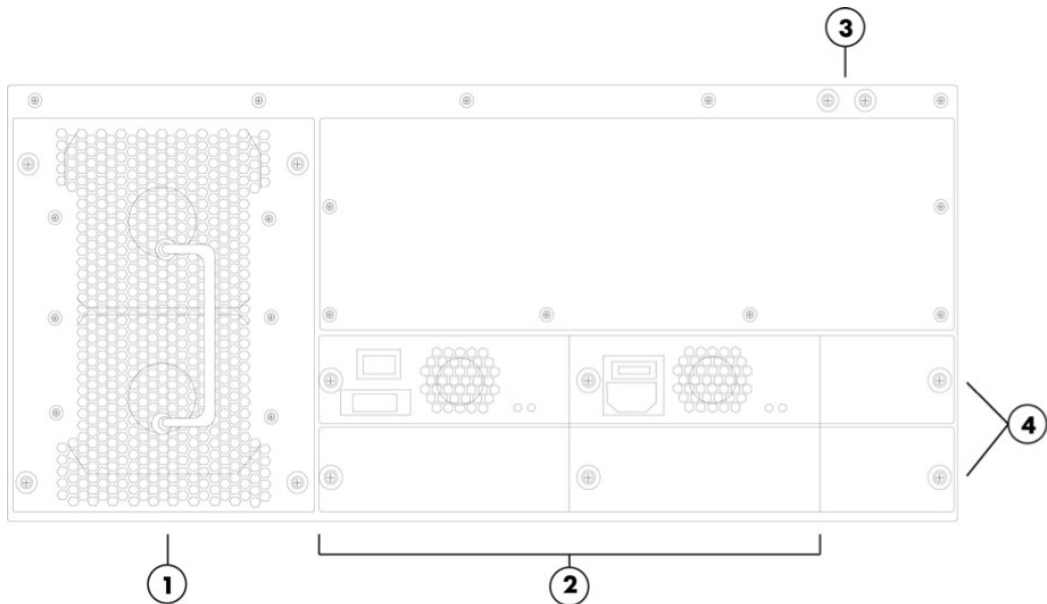


HP MSR4080 Router Chassis - Rear View

- | | |
|-------------|-----------------------|
| 1. Fan tray | 3. Grounding Terminal |
|-------------|-----------------------|

Overview


2. Power Supplies

4. Filler panels of the PoE power supply slots

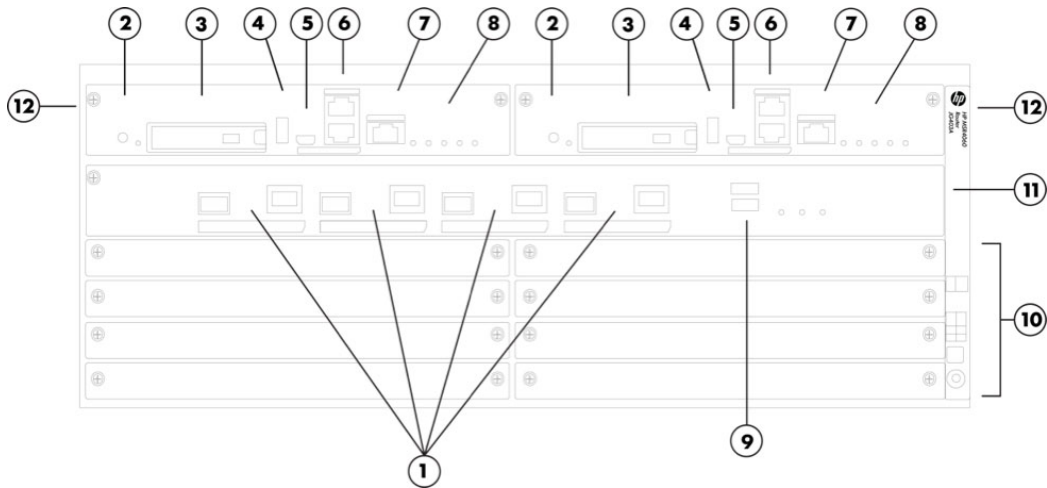

HP MSR4060 Router Chassis(SPU-100) - Front View

- | | |
|---------------------------------------|---|
| 1. 4 Fixed COMBO 1000M RJ45/SFP ports | 7. Management Port |
| 2. Reset Button | 8. System Activity LEDs |
| 3. CF Card Slot | 9. 2 USB 2.0 Port for 3G modem and USB disk |
| 4. USB Port | 10. 6-HMIM modules slot (4 Half Height + 2 Full Height Slots) |
| 5. USB console port | 11. Service Processing Unit |
| 6. CON/AUX port | 12. Main Processing Units |

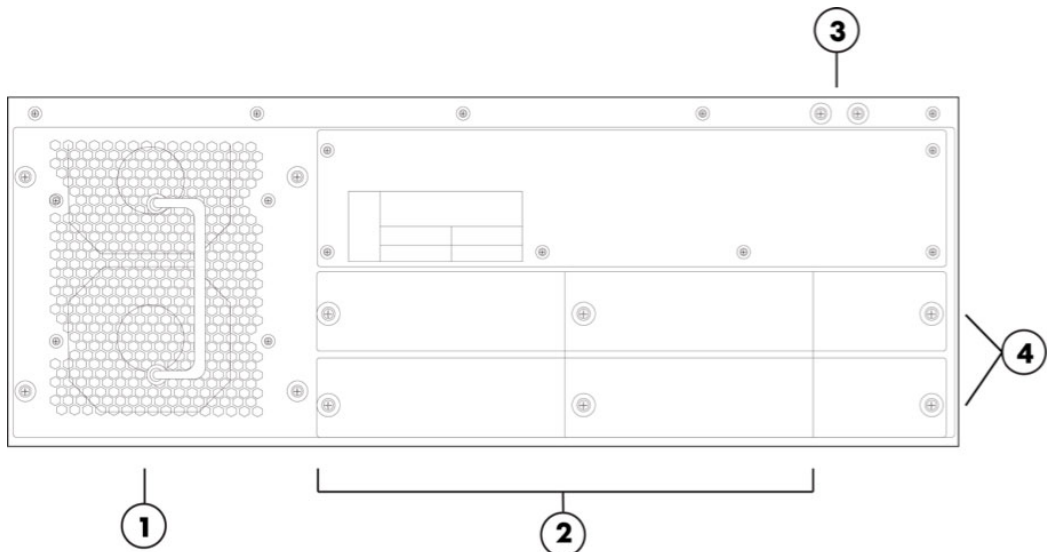

HP MSR4060 Router Chassis - Rear View

- | | |
|-------------------|--|
| 1. Fan Tray | 3. Grounding Terminal |
| 2. Power Supplies | 4. Filler panels of the PoE power supply slots |

Overview

Models

HP MSR4060 Router Chassis

JG403A

HP MSR4080 Router Chassis

JG402A

Key features

- Up to 20 Mpps forwarding performance; support for multiple concurrent services
- High reliability with separated hardware data and control planes, and dual MPUs
- Open Application Platform for HP AllianceOne applications
- Powerful aggregation capacity; integrated 10GbE LAN; support for up to 64 E1 or eight E3/T3 ports
- Zero-touch solution with single pane-of-glass management

Product overview

The HP MSR4000 Router Series, the next generation of router from HP, is a component of the HP FlexBranch solution, which is a part of the comprehensive HP FlexNetwork architecture. These routers feature a modular design that delivers unmatched application services for extra large branch offices, headquarters, and campuses. This gives your IT personnel the benefit of reduced complexity, and simplified configuration, deployment, and management. The MSR4000 series leverages separated data and control planes, dual main processing units (MPUs), and support for up to four power supplies, which provides outstanding performance and reliability.

The MSR4000 routers provide a full-featured, resilient routing platform with the latest multicore CPUs, offer 10 Gigabit switching, provide an enhanced PCI bus, and ship with the latest version of HP Comware software to help ensure high performance with concurrent services. The MSR4000 series provides a full-featured, resilient routing platform, including IPv6 and MPLS, with up to 20 Mpps forwarding capacity and 8 Gb/s of IPSec VPN encrypted throughput. These routers also support HP Open Application Platform (OAP) modules to deliver integrated industry-leading HP AllianceOne partner applications such as virtualization, unified communications and collaboration (UC&C), and application optimization capabilities.

The MSR4000 series provides an agile, flexible network infrastructure that enables you to quickly adapt to your changing business requirements while delivering integrated concurrent services on a single, easy-to-manage platform.

Features and benefits

Performance

- **Excellent forwarding performance**
provides forwarding performance up to 20 Mpps (13.4 Gb/s); meets the bandwidth-intensive application demands of enterprise businesses
- **Powerful security capacity**
provides forwarding performance up to 20 Mpps (13.4 Gb/s); meets the bandwidth-intensive application demands of enterprise businesses

Product architecture

- **Ideal multiservice platform**
provides WAN router, Ethernet switch, firewall, VPN, and SIP/voice gateway all in one device
- **Advanced hardware architecture**
provides multicore processors, gigabit switching, and PCIe bus; dual Main Processing Units, four internal power supplies (N+1 configuration), and internal and external CF cards are offered; new high-performance MIM modules (HMIM) supported
- **New operation system version**
ships with new Comware v7 operating system delivering the latest in virtualization and routing

Overview

- **Open Application Platform architecture**
provides unmatched application and services flexibility, with the potential to deliver the functionality of multiple devices, creating capital and operational expense savings and lasting investment protection
- **Distributed architecture with separation of data and control planes**
delivers enhanced fault tolerance and facilitates near continuous operation and zero service disruption during planned or unplanned control-plane events; service processing units (SPUs) perform data forwarding, encryption/decryption, and analyzing/filtering of data packets; main processing units perform route calculation, forward table maintenance, and configure and monitor the SPU
- **Field-programmable gate array (FPGA)**
improves the bandwidth of SIC module slots from 100 Mb/s to 1000 Mb/s, and improves uplink performance from 1 Gb/s to 10 Gb/s
- **Multi Gigabit Fabric (MGF)**
eases utilization of the main processor by transmitting Layer 2 packets directly via the MGF
- **Main processing unit (MPU)**
provides 1 GbE management port; has default of 512 MB internal CF and 2 GB DDR3 memory
- **Service processing units (SPU)**
includes four 1000BASE-T and four SFP (Combo) slots, two voice processing module slots

Connectivity

- **Powerful aggregation capacity**
supports integrated 10GbE LAN, and up to 64 E1 or eight E3/T3 ports
- **High-density port connectivity**
provides up to eight interface module slots and up to four on-board Gigabit Ethernet and one 10GbE ports
- **Multiple WAN interfaces**
provides traditional links with E1, T1, Serial, and ISDN; high-density Ethernet access with WAN Fast Ethernet and Gigabit Ethernet; and high-speed E3/T3, 155 Mb/s OC3 access options
- **Packet storm protection**
protects against broadcast, multicast, or unicast storms with user-defined thresholds
- **Loopback**
supports internal loopback testing for maintenance purposes and an increase in availability; loopback detection protects against incorrect cabling or network configurations and can be enabled on a per-port or per-VLAN basis for added flexibility
- **USB interface**
uses USB memory disk to download and upload configuration/OS image files; supports an external USB 3G/4G modem for a 3G/4G WAN uplink
- **Flexible port selection**
provides a combination of fiber and copper interface modules, 100/1000BASE-X support, and 10/100/1000BASE-T auto-speed detection plus auto duplex and MDI/MDI-X

Layer 2 switching

- **Spanning Tree Protocol (STP)**
supports standard IEEE 802.1D STP, IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) for faster convergence, and IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)
- **Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) protocol snooping**
controls and manages the flooding of multicast packets in a Layer 2 network
- **Port mirroring**
duplicates port traffic (ingress and egress) to a local or remote monitoring port
- **VLANs**

Overview

supports up to 4,094 VLANs or IEEE 802.1Q-based VLANs

- **sFlow**
allows traffic sampling

Layer 3 routing

- **Static IPv4 routing**
provides simple manually configured IPv4 routing
- **Routing Information Protocol (RIP)**
uses a distance vector algorithm with UDP packets for route determination; supports RIPv1 and RIPv2 routing; includes loop protection
- **Open shortest path first (OSPF)**
delivers faster convergence; uses this link-state routing Interior Gateway Protocol (IGP), which supports ECMP, NSSA, and MD5 authentication for increased security and graceful restart for faster failure recovery
- **Border Gateway Protocol 4 (BGP-4)**
delivers an implementation of the Exterior Gateway Protocol (EGP) utilizing path vectors; uses TCP for enhanced reliability for the route discovery process; reduces bandwidth consumption by advertising only incremental updates; supports extensive policies for increased flexibility; scales to very large networks
- **Intermediate system to intermediate system (IS-IS)**
uses a path vector Interior Gateway Protocol (IGP), which is defined by the ISO organization for IS-IS routing and extended by IETF RFC 1195 to operate in both TCP/IP and the OSI reference model (Integrated IS-IS)
- **Static IPv6 routing**
provides simple manually configured IPv6 routing
- **Dual IP stack**
maintains separate stacks for IPv4 and IPv6 to ease the transition from an IPv4-only network to an IPv6-only network design
- **Routing Information Protocol next generation (RIPng)**
extends RIPv2 to support IPv6 addressing
- **OSPFv3**
provides OSPF support for IPv6
- **BGP+**
extends BGP-4 to support Multiprotocol BGP (MBGP), including support for IPv6 addressing
- **IS-IS for IPv6**
extends IS-IS to support IPv6 addressing
- **IPv6 tunneling**
allows IPv6 packets to traverse IPv4-only networks by encapsulating the IPv6 packet into a standard IPv4 packet; supports manually configured, 6to4, and Intra-Site Automatic Tunnel Addressing Protocol (ISATAP) tunnels; is an important element for the transition from IPv4 to IPv6
- **Multiprotocol Label Switching (MPLS)**
uses BGP to advertise routes across Label Switched Paths (LSPs), but uses simple labels to forward packets from any Layer 2 or Layer 3 protocol, which reduces complexity and increases performance; supports graceful restart for reduced failure impact; supports LSP tunneling and multilevel stacks
- **Multiprotocol Label Switching (MPLS) Layer 3 VPN**
allows Layer 3 VPNs across a provider network; uses Multiprotocol BGP (MP-BGP) to establish private routes for increased security; supports RFC 2547bis multiple autonomous system VPNs for added flexibility; supports IPv6 MPLS VPN
- **Multiprotocol Label Switching (MPLS) Layer 2 VPN**
establishes simple Layer 2 point-to-point VPNs across a provider network using only MPLS Label Distribution Protocol (LDP); requires no routing and therefore decreases complexity, increases performance, and allows VPNs of non-routable protocols; uses no routing information for increased security; supports Circuit Cross Connect (CCC), Static Virtual Circuits (SVCs), Martini draft, and Kompella-draft technologies
- **Routing policy**

Overview

allows custom filters for increased performance and security; supports ACLs, IP prefix, AS paths, community lists, and aggregate policies

Layer 3 services

- **Address Resolution Protocol (ARP)**
determines the MAC address of another IP host in the same subnet; supports static ARPs; gratuitous ARP allows detection of duplicate IP addresses; proxy ARP allows normal ARP operation between subnets or when subnets are separated by a Layer 2 network
- **User Datagram Protocol (UDP) helper**
redirects UDP broadcasts to specific IP subnets to prevent server spoofing
- **Dynamic Host Configuration Protocol (DHCP)**
simplifies the management of large IP networks and supports client and server; DHCP Relay enables DHCP operation across subnets

Quality of Service (QoS)

- **Hierarchical quality of service (HQoS)/Nested QoS**
manages traffic uniformly, and hierarchically schedules traffic by user, network service, and application; provides more granular traffic control and quality assurance services than traditional QoS
- **Traffic policing**
supports Committed Access Rate (CAR) and line rate
- **Congestion management**
supports FIFO, PQ, CQ, WFQ, CBQ, and RTPQ
- **Weighted random early detection (WRED)/random early detection (RED)**
delivers congestion avoidance capabilities through the use of queue management algorithms
- **Other QoS technologies**
supports traffic shaping, MPLS QoS, and MP QoS/LFI

Security

- **Dynamic Virtual Private Network (DVPN)**
collects, maintains, and distributes dynamic public addresses through the VPN Address Management (VAM) protocol, making VPN establishment available between enterprise branches that use dynamic addresses to access the public network; compared to traditional VPN technologies, DVPN technology is more flexible and has richer features, such as NAT traversal of DVPN packets, AAA identity authentication, IPSec protection of data packets, and multiple VPN domain
- **IPSec VPN**
supports DES, 3DES, and AES 128/192/256 encryption, and MD5 and SHA-1 authentication
- **Access control list (ACL)**
supports powerful ACLs for both IPv4 and IPv6; ACLs are used for filtering traffic to prevent unauthorized users from accessing the network, or for controlling network traffic to save resources; rules can either deny or permit traffic to be forwarded; rules can be based on a Layer 2 header or a Layer 3 protocol header; rules can be set to operate on specific dates or times
- **Terminal Access Controller Access-Control System (TACACS+)**
delivers an authentication tool using TCP with encryption of the full authentication request, providing additional security
- **Unicast Reverse Path Forwarding (URPF)**
allows normal packets to be forwarded correctly, but discards the attaching packet due to lack of reverse path route or incorrect inbound interface; prevents source spoofing and distributed attacks
- **Network login**
allows authentication of multiple users per port
- **RADIUS**
eases security access administration by using a user/password authentication server

Overview

- **Network address translation (NAT)**
supports one-to-one NAT, many-to-many NAT, and NAT control, enabling NAT-PT to support multiple connections; supports blacklist in NAT/NAT-PT, a limit on the number of connections, session logs, and multi-instances
- **Secure Shell (SSHv2)**
uses external servers to securely log in into a remote device; with authentication and encryption, it protects against IP spoofing and plain text password interception; increases the security of SFTP transfers

Convergence

- **Internet Group Management Protocol (IGMP)**
utilizes Any-Source Multicast (ASM) or Source-Specific Multicast (SSM) to manage IPv4 multicast networks; supports IGMPv1, v2, and v3
- **Protocol Independent Multicast (PIM)**
defines modes of Internet IPv4 and IPv6 multicasting to allow one-to-many and many-to-many transmission of information; supports PIM Dense Mode (DM), Sparse Mode (SM), and Source-Specific Mode (SSM)
- **Multicast Source Discovery Protocol (MSDP)**
allows multiple PIM-SM domains to interoperate; is used for inter-domain multicast applications
- **Multicast Border Gateway Protocol (MBGP)**
allows multicast traffic to be forwarded across BGP networks and kept separate from unicast traffic

Integration

- **Embedded VPN and firewall**
provides enhanced stateful packet inspection and filtering; delivers advanced VPN services with Triple DES (3DES) and Advanced Encryption Standard (AES) encryption at high performance and low latency, Web content filtering, and application prioritization and enhancement
- **Embedded NetStream**
improves traffic distribution using powerful scheduling algorithms, including Layer 4 to 7 services; monitors the health status of servers and firewalls
- **SIP trunking**
delivers multiple concurrent calls on one link; the carrier authenticates only the link, rather than carrying each SIP call on the link

Resiliency and high availability

- **Backup Center**
acts as a part of the management and backup function to provide backup for device interfaces; delivers reliability by switching traffic over to a backup interface when the primary one fails
- **Virtual Router Redundancy Protocol (VRRP)**
allows groups of two routers to dynamically back each other up to create highly available routed environments; supports VRRP load balancing
- **In-Service Software Upgrade (ISSU)**
lowers downtime caused by planned maintenance and software upgrades
- **Embedded Automation Architecture (EAA)**
monitors the internal event and status of system hardware and software, identifying potential problems as early as possible; collects field information and attempts to automatically repair the issues; based on the user configuration, onsite information will be sent to technical support
- **Multiple internal power supply slots**
delivers higher reliability with a maximum of four internal power supplies, which can be installed
- **Bidirectional Forwarding Detection (BFD)**
detects quickly the failures of the bidirectional forwarding paths between two devices for upper-layer protocols such as routing protocols and MPLS.

Overview

Management

- **HP Intelligent Management Center (IMC)**
integrates fault management, element configuration, and network monitoring from a central vantage point; built-in support for third-party devices enables network administrators to centrally manage all network elements with a variety of automated tasks, including discovery, categorization, baseline configurations, and software images; the software also provides configuration comparison tools, version tracking, change alerts, and more
- **Industry-standard CLI with a hierarchical structure**
reduces training time and expenses, and increases productivity in multivendor installations
- **Management security**
restricts access to critical configuration commands; offers multiple privilege levels with password protection; ACLs provide telnet and SNMP access; local and remote syslog capabilities allow logging of all access
- **SNMPv1, v2, and v3**
provide complete support of SNMP; provide full support of industry-standard Management Information Base (MIB) plus private extensions; SNMPv3 supports increased security using encryption
- **Remote monitoring (RMON)**
uses standard SNMP to monitor essential network functions; supports events, alarm, history, and statistics group plus a private alarm extension group
- **FTP, TFTP, and SFTP support**
offers different mechanisms for configuration updates; FTP allows bidirectional transfers over a TCP/IP network; trivial FTP (TFTP) is a simpler method using User Datagram Protocol (UDP); Secure File Transfer Protocol (SFTP) runs over an SSH tunnel to provide additional security
- **Debug and sampler utility**
supports ping and traceroute for both IPv4 and IPv6
- **Network Time Protocol (NTP)**
synchronizes timekeeping among distributed time servers and clients; keeps timekeeping consistent among all clock-dependent devices within the network so that the devices can provide diverse applications based on the consistent time
- **Information center**
provides a central repository for system and network information; aggregates all logs, traps, and debugging information generated by the system and maintains them in order of severity; outputs the network information to multiple channels based on user-defined rules
- **Management interface control**
provides management access through modem port and terminal interface; provides access through terminal interface, telnet, or SSH
- **Network Quality Analyzer (NQA)**
analyzes network performance and service quality by sending test packets, and provides network performance and service quality parameters such as jitter, TCP, or FTP connection delays; allows network manager to determine overall network performance and diagnose and locate network congestion points or failures
- **Role-based security**
delivers role-based access control (RBAC); supports 16 user levels (0~15)
- **Standards-based authentication support for LDAP**
integrates seamlessly into existing authentication services

Ease of deployment

- **Zero-touch deployment**
supports both USB disk auto deployment and 3G SMS auto deployment

Additional information



Overview

- **OPEX savings**
simplifies and streamlines deployment, management, and training through the use of a common operating system, thereby cutting costs as well as reducing the risk of human errors associated with having to manage multiple operating systems across different platforms and network layers
- **Faster time to market**
allows new and custom features to be brought rapidly to market through engineering efficiencies, delivering better initial and ongoing stability
- **Green initiative support**
provides support for RoHS and WEEE regulations

Warranty and support

- **1-year Warranty 2.0**
advance hardware replacement with 10-calendar-day delivery (available in most countries)
- **Electronic and telephone support (for Warranty 2.0)**
limited electronic and 24x7 telephone support is available from HP for the entire warranty period; to reach our support centers, refer to www.hp.com/networking/contact-support; for details on the duration of support provided with your product purchase, refer to www.hp.com/networking/warrantysummary
- **Software releases**
to find software for your product, refer to www.hp.com/networking/support; for details on the software releases available with your product purchase, refer to www.hp.com/networking/warrantysummary

Configuration

Build To Order:

BTO is a standalone unit with no integration. BTO products ship standalone are not part of a CTO or Rack-Shippable solution.

Router Chassis

HP MSR4080 Router Chassis JG402A

- Must select 1 Main Processing Unit
- Must select 1 Service Processing Unit
- Must select 1 Power Supply
- 8-HMIM modules slot (4 Half Height + 4 Full Height Slots)
- 5U - Height

HP MSR4060 Router Chassis JG403A

- Must select 1 Main Processing Unit
- Must select 1 Service Processing Unit
- Must select 1 Power Supply
- 6-HMIM modules slot (4 Half Height + 2 Full Height Slots)
- 4U - Height

Box Level Integration CTO Models

CTO Router Chassis

HP MSR CTO Router Solution JG500A

- SSP trigger sku

HP MSR4080 Router Chassis JG402A

- Must select 1 Main Processing Unit
- Must select 1 Service Processing Unit
- Must select 1 Power Supply
- 8-HMIM modules slot (4 Half Height + 4 Full Height Slots)
- 5U - Height

See Configuration
Note:1

HP MSR4060 Router Chassis JG403A

- Must select 1 Main Processing Unit
- Must select 1 Service Processing Unit
- Must select 1 Power Supply
- 6-HMIM modules slot (4 Half Height + 2 Full Height Slots)
- 4U - Height

See Configuration
Note:1

Configuration Rules:

Note 1 If the Router Chassis is to be Box Level Factory Integrated (CTO), Then the #0D1 is required on the Router Chassis and integrated to the JG500A - HP MSR CTO Enablement. (Min 1/Max 1 Router per SSP)

Rack Level Integration CTO Models

Configuration

Router Chassis

HP MSR4080 Router Chassis

- Must select 1 Main Processing Unit
- Must select 1 Service Processing Unit
- Must select 1 Power Supply
- 8-HMIM modules slot (4 Half Height + 4 Full Height Slots)
- 5U - Height

JG402A
See Configuration
Note:1

HP MSR4060 Router Chassis

- Must select 1 Main Processing Unit
- Must select 1 Service Processing Unit
- Must select 1 Power Supply
- 6-HMIM modules slot (4 Half Height + 2 Full Height Slots)
- 4U - Height

JG403A
See Configuration
Note:1

Configuration Rules:

Note 1 If the CTO Router Chassis needs to be racked, Then the CTO Base Model needs to integrate (with #0D1) to the HP Networking Rack.

Power Supplies

System (std 0// max 4) User Selection (min 1 // max 4) per MSR4000 Router Chassis

HP X351 300W 100-240VAC to 12VDC Power Supply

JG527A
See Configuration
Note:1, 2

PDU Cable NA/MEX/TW/JP

- C15 PDU Jumper Cord (NA/MEX/TW/JP)

JG527A#B2B

PDU Cable ROW

- C15 PDU Jumper Cord (ROW)

JG527A#B2C

High Volt Switch to Wall Power Cord

- NEMA L6-20P Cord (NA/MEX/JP/TW)

JG527A#B2E

Configuration Rules:

Note 1 Localization required on orders without #B2B, #B2C or #B2E options.

Note 2 If #B2E is selected Then replace Localized option with #B2E for power supply and with #B2E for switch . (Offered only in NA, Mexico,, Taiwan, and Japan)

Configuration

Remarks:

Drop down under power supply should offer the following options and results:
Switch/Router/Power Supply to PDU Power Cord - #B2B in North America, Mexico, Taiwan, and Japan or #B2C ROW. (Watson Default B2B or B2C for Rack Level CTO)
Switch/Router/Power Supply to Wall Power Cord - Localized Option (Watson Default for BTO and Box Level CTO)
High Volt Switch/Router/Power Supply to Wall Power Cord - #B2E Option. (Offered only in North America, Mexico, Taiwan, and Japan)

Enter the following menu selections as integrated to the CTO Model X server above if order is factory built.

Main Processing Units

HP MSR4000 MPU-100 Main Processing Unit

- default=2GB \ max=4GB DDR SDRAM (4GB Max, by replacing existing single 2GB SDRAM)
- External CF Card slot - Default 0 // max 1 CF Card

JG412A
See Configuration
Note:1, 2, 3

Configuration Rules:

Note 1 Service Processing Units (JG413A or JG414A) must be selected with the Main Processing Unit (JG412A)

Note 2 The following DDR SDRAM install into this Module:
HP X610 4GB DDR3 SDRAM UDIMM Memory (Must remove existing 2GB UDIMM to install the 4GB JG530A UDIMM)

Note 3 The following CF Card install into this Module:
HP X600 256M Compact Flash Card JG686A
HP X600 512M Compact Flash Card JG685A
HP X600 1G Compact Flash Card JG684A

Service Processing Units

HP MSR4000 SPU-100 Service Processing Unit

- 4 Fixed COMBO 1000M RJ45/SFP ports
- min=0 \ max=4 SFP Transceivers
- min=0 \ max=2 VPM Modules
- default=2GB \ max=2GB DDR SDRAM

JG413A
See Configuration
Note:1, 2

HP MSR4000 SPU-200 Service Processing Unit

- 4 Fixed COMBO 1000M RJ45/SFP ports
- min=0 \ max=4 SFP Transceivers
- 1 - SFP+ Port
- min=0 \ max=1 SFP+ Transceiver
- min=0 \ max=2 VPM Modules
- default=2GB \ max=2GB DDR SDRAM

JG414A
See Configuration
Note:1, 2, 3

Configuration Rules:



Configuration

Note 1	The following SFP Transceivers install into this SPU:	
	HP X120 1G SFP LC SX Transceiver	JD118B
	HP X120 1G SFP LC LX Transceiver	JD119B
	HP X125 1G SFP LC LH40 1310nm Transceiver	JD061A
	HP X120 1G SFP LC LH40 1550nm Transceiver	JD062A
	HP X125 1G SFP LC LH70 Transceiver	JD063B
	HP X120 1G SFP LC LH100 Transceiver	JD103A
	HP X115 100M SFP LC FX Transceiver	JD102B
	HP X110 100M SFP LC LX Transceiver	JD120B
	HP X110 100M SFP LC LH40 Transceiver	JD090A
	HP X110 100M SFP LC LH80 Transceiver	JD091A
	HP X120 1G SFP LC BX 10-U Transceiver	JD098B
	HP X120 1G SFP LC BX 10-D Transceiver	JD099B
Note 2	The following VPM Modules install into this SPU:	
	HP MSR G2 128-channel Voice Processing Module	JG417A
Note 3	The following SFP+ Transceivers install into this SPU:	
	HP X130 10G SFP+ LC LRM Transceiver	JD093B
	HP X130 10G SFP+ LC ER 40km Transceiver	JG234A
	HP X240 10G SFP+ SFP+ 0.65m DAC Cable	JD095C
	HP X240 10G SFP+ SFP+ 1.2m DAC Cable	JD096C
	HP X240 10G SFP+ SFP+ 3m DAC Cable	JD097C
	HP X240 10G SFP+ SFP+ 5m DAC Cable	JG081C

HMIM Modules

System (std 0 // max 6 or 8) User Selection (min 0 // max 6 or 8) per Router Chassis (See Modules for Port information)

HP MSR 1-port E1 Voice HMIM Module		JG429A
<ul style="list-style-type: none"> • (Full Height Module; Takes up 1 - Full Height slot or 2 - Half Height slots, vertically) min=0 \ max=1 E1 Cable 		See Configuration Note:1, 3, 5, 11
HP MSR 1-port T1 Voice HMIM Module		JG430A
<ul style="list-style-type: none"> • (Full Height Module; Takes up 1 - Full Height slot or 2 - Half Height slots, vertically) min=0 \ max=1 E1 Cable 		See Configuration Note:1 ,3, 10, 11
HP MSR 2-port E1 Voice HMIM Module		JG431A
<ul style="list-style-type: none"> • (Full Height Module; Takes up 1 - Full Height slot or 2 - Half Height slots, vertically) min=0 \ max=1 E1 Cable 		See Configuration Note:1, 3, 5, 11
HP MSR 1-port T3 / CT3 / FT3 HMIM Module		JG435A
<ul style="list-style-type: none"> • (Half Height Module; Takes up 1 Half Height or 1 Full Height slot) min=0 \ max=2 E3/T3 Cable 		See Configuration Note:2 ,4 ,6

Configuration

HP MSR 1-port E3 / CE3 / FE3 HMIM Module	JG436A
<ul style="list-style-type: none">(Half Height Module; Takes up 1 Half Height or 1 Full Height slot) min=0 \ max=2 E3/T3 Cable	See Configuration Note:2, 4, 6
HP MSR 1-port OC-3c / STM-1c POS HMIM Module	JG438A
<ul style="list-style-type: none">(Half Height Module; Takes up 1 Half Height or 1 Full Height slot) min=0 \ max=1 SFP Transceiver	See Configuration Note:2, 4, 7
HP MSR 4-port Enhanced Sync / Async Serial HMIM Module	JG442A
<ul style="list-style-type: none">(Half Height Module; Takes up 1 Half Height or 1 Full Height slot) min=0 \ max=4 Serial Port Cable	See Configuration Note:2, 4, 8
HP MSR 8-port Enhanced Sync / Async Serial HMIM Module	JG443A
<ul style="list-style-type: none">(Half Height Module; Takes up 1 Half Height or 1 Full Height slot) min=0 \ max=8 Serial Port Cable	See Configuration Note:2, 4, 8
HP MSR 4-port FXS HMIM Module	JG446A
<ul style="list-style-type: none">(Half Height Module; Takes up 1 Half Height or 1 Full Height slot)	See Configuration Note:2, 4
HP MSR 4-port FXO HMIM Module	JG447A
<ul style="list-style-type: none">(Half Height Module; Takes up 1 Half Height or 1 Full Height slot)	See Configuration Note:2, 4
HP MSR 4-port E&M HMIM Module	JG448A
<ul style="list-style-type: none">(Half Height Module; Takes up 1 Half Height or 1 Full Height slot)	See Configuration Note:2, 4
HP MSR 2-port E1 / CE1 / PRI HMIM Module	JG450A
<ul style="list-style-type: none">(Half Height Module; Takes up 1 Half Height or 1 Full Height slot) min=0 \ max=2 E1 Cable	See Configuration Note:2, 4, 5
HP MSR 4-port E1 / CE1 / PRI HMIM Module	JG451A
<ul style="list-style-type: none">(Half Height Module; Takes up 1 Half Height or 1 Full Height slot) min=0 \ max=4 E1 Cable	See Configuration Note:2, 4, 5
HP MSR 8-port E1 / CE1 / PRI (75ohm) HMIM Module	JG452A
<ul style="list-style-type: none">(Half Height Module; Takes up 1 Half Height or 1 Full Height slot) min=0 \ max=1 8E1 Cable	See Configuration Note:2, 4, 9
HP MSR 4-port E1 / Fractional E1 HMIM Module	JG453A
<ul style="list-style-type: none">(Half Height Module; Takes up 1 Half Height or 1 Full Height slot) min=0 \ max=4 E1 Cable	See Configuration Note:2, 4, 5
HP MSR 2-port T1 / CT1 / PRI HMIM Module	JG456A

Configuration

- (Half Height Module; Takes up 1 Half Height or 1 Full Height slot) See Configuration Note:2, 4

HP MSR 4-port T1 / Fractional T1 HMIM Module

- (Half Height Module; Takes up 1 Half Height or 1 Full Height slot) See Configuration Note:2, 4

HP MSR 1U HMIM Adapter Module

- (Half Height Module; Takes up 1 Half Height or 1 Full Height slot) See Configuration Note:2, 4, 12

HP MSR 0.5U HMIM Adapter Module

- (Half Height Module; Takes up 1 Half Height or 1 Full Height slot) See Configuration Note:2, 4, 13

Configuration Rules:

Note 1 These Modules can install directly to the Router Chassis (JG402A)
min=0\ max=6 per enclosure (Full Height Module; Takes up 1 - Full Height slot or 2 - Half Height slots, vertically)

Note 2 These Modules can install directly to the Router Chassis (JG402A)
min=0\ max=8 per enclosure

Note 3 These Modules can install directly to the Router Chassis (JG403A)
min=0\ max=4 per enclosure (Full Height Module; Takes up 1 - Full Height slot or 2 - Half Height slots, vertically)

Note 4 These Modules can install directly to the Router Chassis (JG403A)
min=0\ max=6 per enclosure

Note 5 The following Cables install into this Module:

HP X260 E1 (2) BNC 75 ohm 3m Rtr Cable	JD175A
HP X260 E1 BNC 20m Router Cable	JD514A
HP X260 E1/2 BNC 75 ohm 40m Router Cable	JD516A
HP X260 E1 RJ45 3m Router Cable	JD509A
HP X260 E1 RJ45 20m Router Cable	JD517A

Note 6 The following E3/T3 Cable and Connector install into this Module:

HP X260 T3/E3 Router Cable	JD531A
HP X260 E3-30 E3/T3 Router Cable	JD533A

Note 7 The following Transceivers install into this Module:

HP X115 100M SFP LC FX Transceiver	JD102B
HP X110 100M SFP LC LX Transceiver	JD120B
HP X110 100M SFP LC LH40 Transceiver	JD090A
HP X110 100M SFP LC LH80 Transceiver	JD091A

Configuration

Note 8	The following Cables install into this Module: HP X260 RS449 3m DCE Serial Port Cable HP X260 RS449 3m DTE Serial Port Cable HP X200 X.21 DCE 3m Serial Port Cable HP X200 V.24 DTE 3m Serial Port Cable HP X200 V.35 DTE 3m Serial Port Cable HP X260 RS530 3m DTE Serial Port Cable HP X200 V.35 DCE 3m Serial Port Cable HP X260 RS530 3m DCE Serial Port Cable HP X200 V.24 DCE 3m Serial Port Cable HP X200 X.21 DTE 3m Serial Port Cable	JF826A JF825A JD529A JD519A JD523A JF827A JD525A JF828A JD521A JD527A
Note 9	The following Cable install into this Module: HP X260 8E1 BNC 75 ohm 3m Router Cable	JD512A
Note 10	The following T1 Cables install into this Module: HP X260 T1 Router Cable	JD518A
Note 11	Full Height Module; Takes up 1 - Full Height slot or 2 - Half Height slots, vertically	
Note 12	1U HMIM Adapter Modules can adapt the following MIM Modules: HP A-MSR 1-port E1 Voice MIM Module HP A-MSR 2-port E1 Voice MIM Module HP A-MSR 1-port T1 Voice MIM Module HP A-MSR 2-port T1 Voice MIM Module HP A-MSR 16-port FXS MIM Module HP A-MSR 16-port Enhanced Async Serial MIM Module	JD565B JD567B JD566B JD568B JF822A JF841A
Note 13	0.5U HMIM Adapter Modules can adapt following MIM Modules: HP A-MSR 8-port Enhanced Async Serial MIM Module HP A-MSR 1-port T3/CT3/FT3 MIM Module HP A-MSR 1-port E3/CE3/FE3 MIM Module HP A-MSR 1-port OC-3c/STM-1c POS MIM Module HP A-MSR 2-port Enhanced Sync/Async Serial MIM Module HP A-MSR 4-port Enhanced Sync/Async Serial MIM Module HP A-MSR 8-port Enhanced Sync/Async Serial MIM Module HP A-MSR 4-port FXS MIM Module HP A-MSR 4-port FXO MIM Module HP A-MSR 4-port E&M MIM Module HP A-MSR 2-port E1/CE1/PRI MIM Module HP A-MSR 4-port E1/CE1/PRI MIM Module HP A-MSR 8-port E1/CE1/PRI (75ohm) MIM Module HP A-MSR 4-port E1/Fractional E1 MIM Module HP A-MSR 8-port E1/Fractional E1 (75ohm) MIM Module HP A-MSR 2-port T1/CT1/PRI MIM Module	JF840A JD628A JD630A JG193A JD540A JD541A JD552A JD553A JD542A JD539A JD544B JD550B JD563A JF257B JF255A JD549A

Configuration

HP A-MSR 4-port T1/Fractional T1 MIM Module	JF254B
HP A-MSR 8-port T1/CT1/PRI MIM Module	JC160A
HP A-MSR 8-port T1/Fractional T1 MIM Module	JC159A
HP A-MSR 2-port 10/100Base-T MIM Module	JD613A
HP A-MSR 4-port 10/100Base-T MIM Module	JD551A
HP A-MSR 2-port Gig-T MIM Module	JD548A
HP A-MSR 2-port FXO MIM Module	JD543A
HP A-MSR 4-port ISDN-S/T Voice MIM Module	JF837A

VPM Modules

HP MSR G2 128-channel Voice Processing Module	JG417A See Configuration Note:1
---	------------------------------------

Configuration Rules:

Note 1 These Modules can install directly to the Service Processing Unit
min=0\ max=2 per SPU

Transceivers

SFP Transceivers

System (std 0 // max 4) User Selection (min 0 // max 4) per SPU

HP X120 1G SFP LC SX Transceiver	JD118B
HP X120 1G SFP LC LX Transceiver	JD119B
HP X125 1G SFP LC LH40 1310nm Transceiver	JD061A
HP X120 1G SFP LC LH40 1550nm Transceiver	JD062A
HP X125 1G SFP LC LH70 Transceiver	JD063B
HP X110 100M SFP LC LH40 Transceiver	JD090A
HP X110 100M SFP LC LH80 Transceiver	JD091A
HP X115 100M SFP LC FX Transceiver	JD102B
HP X110 100M SFP LC LX Transceiver	JD120B
HP X120 1G SFP LC LH100 Transceiver	JD103A

Configuration

HP X120 1G SFP LC BX 10-U Transceiver JD098B

HP X120 1G SFP LC BX 10-D Transceiver JD099B

SFP+ Transceivers

HP X130 10G SFP+ LC LRM Transceiver JD093B

HP X130 10G SFP+ LC ER 40km Transceiver JG234A

HP X240 10G SFP+ SFP+ 0.65m DAC Cable JD095C#B01

HP X240 10G SFP+ SFP+ 1.2m DAC Cable JD096C#B01

HP X240 10G SFP+ SFP+ 3m DAC Cable JD097C#B01

HP X240 10G SFP+ SFP+ 5m DAC Cable JG081C#B01

Cables

HP X200 V.24 DTE 3m Serial Port Cable JD519A

HP X200 V.24 DCE 3m Serial Port Cable JD521A

HP X200 V.35 DTE 3m Serial Port Cable JD523A

HP X200 V.35 DCE 3m Serial Port Cable JD525A

HP X200 X.21 DTE 3m Serial Port Cable JD527A

HP X200 X.21 DCE 3m Serial Port Cable JD529A

HP X260 RS449 3m DTE Serial Port Cable JF825A

HP X260 RS449 3m DCE Serial Port Cable JF826A

HP X260 RS530 3m DTE Serial Port Cable JF827A

HP X260 RS530 3m DCE Serial Port Cable JF828A

HP X260 Auxiliary Router Cable JD508A

HP X260 E1 RJ45 3m Router Cable JD509A

Configuration

HP X260 E1 RJ45 20m Router Cable	JD517A
HP X260 E1 (2) BNC 75 ohm 3m Rtr Cable	JD175A
HP X260 E1 BNC 20m Router Cable	JD514A
HP X260 E1/2 BNC 75 ohm 40m Router Cable	JD516A
HP X260 E1 RJ45 BNC 75-120 ohm Conversion Router Cable	JD511A
HP X260 T1 Router Cable	JD518A
HP X260 T1 Voice Router Cable	JD535A
HP X260 T3/E3 Router Cable	JD531A
HP X260 E3-30 E3/T3 Router Cable	JD533A
HP X260 8E1 BNC 75 ohm 3m Router Cable	JD512A

Configuration Rules:

Remarks:	The following cable is used for RJ45 BNC Conversion - HP X260 E1 RJ45 BNC 75-120 ohm Conversion Router Cable	JD511A
	The following Connector is used to extend E1/T1 Cables: HP X500 T1/E1 Voice RJ45 Interface Connector	JD535A

Router Enclosure Options

SDRAM

User Selection (min 0 // max 1) (default=2GB \ max=4GB) per MPU-100 Main Processing Unit (4GB Max, by replacing existing single 2GB SDRAM)

HP X610 2GB DDR3 SDRAM UDIMM Memory	JG529A
• Spare Only (Parts List Only)	
HP X610 4GB DDR3 SDRAM UDIMM Memory	JG530A
• (Must remove existing 2GB UDIMM to install the 4GB UDIMM)	

Compact Flash Card

System (std 0 // max 1 External CF Card) per MPU

Configuration

HP X600 1G Compact Flash Card	JC684A
HP X600 512M Compact Flash Card	JC685A
HP X600 256M Compact Flash Card	JC686A

Technical Specifications

HP MSR4060 Router Chassis (JG403A)

Ports	2 MPU (Main Processing Unit) slots 1 SPU (Service Processing Unit) slot 6 HMIM slots 4 Power Supply slots										
Physical characteristics	<table border="0"> <tr> <td style="vertical-align: top;">Dimensions</td> <td>17.32(w) x 18.9(d) x 6.89(h) in (44 x 48 x 17.50 cm) (4U height)</td> </tr> <tr> <td style="vertical-align: top;">Weight</td> <td>45.52 lb (20.65 kg)</td> </tr> </table>	Dimensions	17.32(w) x 18.9(d) x 6.89(h) in (44 x 48 x 17.50 cm) (4U height)	Weight	45.52 lb (20.65 kg)						
Dimensions	17.32(w) x 18.9(d) x 6.89(h) in (44 x 48 x 17.50 cm) (4U height)										
Weight	45.52 lb (20.65 kg)										
Memory and processor	MPU-100, 2 cores RISC @ 1 GHz, 512 MB flash capacity, 2 GB DDR3 SDRAM										
Mounting	Desktop or can be mounted in a EIA standard 19-inch telco rack when used with the rack-mount kit in the package.										
Performance	<table border="0"> <tr> <td style="vertical-align: top;">Throughput</td> <td>up to 20 Mpps (64-byte packets)</td> </tr> <tr> <td style="vertical-align: top;">Routing table size</td> <td>1000000 entries (IPv4), 1000000 entries (IPv6)</td> </tr> <tr> <td style="vertical-align: top;">Forwarding table size</td> <td>1000000 entries (IPv4), 1000000 entries (IPv6)</td> </tr> <tr> <td style="vertical-align: top;">GRE tunnels</td> <td>4000, max</td> </tr> </table>	Throughput	up to 20 Mpps (64-byte packets)	Routing table size	1000000 entries (IPv4), 1000000 entries (IPv6)	Forwarding table size	1000000 entries (IPv4), 1000000 entries (IPv6)	GRE tunnels	4000, max		
Throughput	up to 20 Mpps (64-byte packets)										
Routing table size	1000000 entries (IPv4), 1000000 entries (IPv6)										
Forwarding table size	1000000 entries (IPv4), 1000000 entries (IPv6)										
GRE tunnels	4000, max										
Environment	<table border="0"> <tr> <td style="vertical-align: top;">Operating temperature</td> <td>32°F to 113°F (0°C to 45°C)</td> </tr> <tr> <td style="vertical-align: top;">Operating relative humidity</td> <td>5% to 90%, noncondensing</td> </tr> <tr> <td style="vertical-align: top;">Nonoperating/Storage temperature</td> <td>-40°F to 158°F (-40°C to 70°C)</td> </tr> <tr> <td style="vertical-align: top;">Nonoperating/Storage relative humidity</td> <td>5% to 90%, noncondensing</td> </tr> <tr> <td style="vertical-align: top;">Altitude</td> <td>up to 16,404 ft (5 km)</td> </tr> </table>	Operating temperature	32°F to 113°F (0°C to 45°C)	Operating relative humidity	5% to 90%, noncondensing	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)	Nonoperating/Storage relative humidity	5% to 90%, noncondensing	Altitude	up to 16,404 ft (5 km)
Operating temperature	32°F to 113°F (0°C to 45°C)										
Operating relative humidity	5% to 90%, noncondensing										
Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)										
Nonoperating/Storage relative humidity	5% to 90%, noncondensing										
Altitude	up to 16,404 ft (5 km)										
Electrical characteristics	<table border="0"> <tr> <td style="vertical-align: top;">Frequency</td> <td>50/60 Hz</td> </tr> <tr> <td style="vertical-align: top;">Maximum heat dissipation</td> <td>285/347 BTU/hr (300.67/366.09 kJ/hr), lower number is with SPU-100 module installed; higher number is for SPU-200</td> </tr> <tr> <td style="vertical-align: top;">Voltage</td> <td>100-120/200-240 VAC</td> </tr> <tr> <td style="vertical-align: top;">Maximum power rating</td> <td>300 W</td> </tr> <tr> <td style="vertical-align: top;">Notes</td> <td>Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. No default power supply is included in the chassis; a minimum of one/maximum of four power supplies should be ordered.</td> </tr> </table>	Frequency	50/60 Hz	Maximum heat dissipation	285/347 BTU/hr (300.67/366.09 kJ/hr), lower number is with SPU-100 module installed; higher number is for SPU-200	Voltage	100-120/200-240 VAC	Maximum power rating	300 W	Notes	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. No default power supply is included in the chassis; a minimum of one/maximum of four power supplies should be ordered.
Frequency	50/60 Hz										
Maximum heat dissipation	285/347 BTU/hr (300.67/366.09 kJ/hr), lower number is with SPU-100 module installed; higher number is for SPU-200										
Voltage	100-120/200-240 VAC										
Maximum power rating	300 W										
Notes	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. No default power supply is included in the chassis; a minimum of one/maximum of four power supplies should be ordered.										
Reliability	MTBF (years) 178.66										
Safety	UL 60950-1; AS/NZS 60950; EN 60825-1 Safety of Laser Products-Part 1; EN 60825-2 Safety of Laser Products-Part 2; IEC 60950-1; CAN/CSA-C22.2 No. 60950-1-03; EN 60950-1/A11; FDA 21 CFR Subchapter J										
Emissions	EN 55022 Class A; ICES-003 Class A; ANSI C63.4 2003; ETSI EN 300 386 V1.3.3; AS/NZS CISPR 22 Class A; EN 61000-4-2; EN 61000-4-3; EN 61000-4-4; EN 61000-4-5; EN 61000-4-6; EN 61000-3-2:2006; EN 61000-3-3:1995 +A1:2001+A2:2005; EMC Directive 2004/108/EC; FCC (CFR 47, Part 15) Class A; EN 55024:1998+ A1:2001 + A2:2003; EN 61000-4-11:2004; EN 61000-4-8:2001										
Telecom	FCC part 68; CS-03										

Technical Specifications

Management	IMC - Intelligent Management Center; command-line interface; limited command-line interface; configuration menu; out-of-band management (RJ-45 Ethernet); SNMP Manager; Telnet; RMON1; FTP; in-line and out-of-band; modem interface; out-of-band management (serial RS-232C or Micro USB); IEEE 802.3 Ethernet MIB
Services	<p>3-year, parts only, global next-day advance exchange (UW075E)</p> <p>3-year, 4-hour onsite, 13x5 coverage for hardware (UW076E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware (UW006E)</p> <p>3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (UW009E)</p> <p>3-year, 24x7 SW phone support, software updates (UW012E)</p> <p>1-year, post-warranty, 4-hour onsite, 13x5 coverage for hardware (HR554E)</p> <p>1-year, post-warranty, 4-hour onsite, 24x7 coverage for hardware (HR555E)</p> <p>1-year, post-warranty, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (HR556E)</p> <p>4-year, 4-hour onsite, 13x5 coverage for hardware (UW077E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware (UW007E)</p> <p>4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UW010E)</p> <p>4-year, 24x7 SW phone support, software updates (UW013E)</p> <p>5-year, 4-hour onsite, 13x5 coverage for hardware (UW078E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware (UW008E)</p> <p>5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UW011E)</p> <p>5-year, 24x7 SW phone support, software updates (UW014E)</p> <p>3 Yr 6 hr Call-to-Repair Onsite (UW079E)</p> <p>4 Yr 6 hr Call-to-Repair Onsite (UW080E)</p> <p>5 Yr 6 hr Call-to-Repair Onsite (UW081E)</p> <p>1-year, 6 hour Call-To-Repair Onsite for hardware (HR558E)</p> <p>1-year, 24x7 software phone support, software updates (HR557E)</p>

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

HP MSR4080 Router Chassis (JG402A)

Ports	<p>2 MPU (Main Processing Unit) slots</p> <p>1 SPU (Service Processing Unit) slot</p> <p>8 HMIM slots</p> <p>4 Power Supply slots</p>	
Physical characteristics	Dimensions	17.32(w) x 18.9(d) x 8.64(h) in (44 x 48 x 21.95 cm) (5U height)
	Weight	49.93 lb (22.65 kg)
Memory and processor	MPU-100, 2 cores RISC @ 1 GHz, 512 MB flash capacity, 2 GB DDR3 SDRAM	
Mounting	Desktop or can be mounted in a EIA-standard 19 in. telco rack when used with the rack-mount kit in the package	
Performance	Throughput	up to 20 Mpps (64-byte packets)
	Routing table size	1000000 entries (IPv4), 1000000 entries (IPv6)
	Forwarding table size	1000000 entries (IPv4), 1000000 entries (IPv6)
	GRE tunnels	4000, max
Environment	Operating temperature	32°F to 113°F (0°C to 45°C)

Technical Specifications

	Operating relative humidity	5% to 90%, noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Nonoperating/Storage relative humidity	5% to 90%, noncondensing
	Altitude	up to 16,404 ft (5 km)
Electrical characteristics	Frequency	50/60 Hz
	Maximum heat dissipation	297/358 BTU/hr (313.33/377.69 kJ/hr), lower number is with SPU-100 module installed; higher number is for SPU-200
	Voltage	100-120/200-240 VAC
	Maximum power rating	300 W
	Notes	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. No default power supply is included in the chassis; a minimum of one/maximum of four power supplies should be ordered.
Reliability	MTBF (years)	178.66
Safety	UL 60950-1; AS/NZS 60950; EN 60825-1 Safety of Laser Products-Part 1; EN 60825-2 Safety of Laser Products-Part 2; IEC 60950-1; CAN/CSA-C22.2 No. 60950-1-03; EN 60950-1/A11; FDA 21 CFR Subchapter J	
Emissions	EN 55022 Class A; ICES-003 Class A; ANSI C63.4 2003; ETSI EN 300 386 V1.3.3; AS/NZS CISPR 22 Class A; EN 61000-4-2; EN 61000-4-3; EN 61000-4-4; EN 61000-4-5; EN 61000-4-6; EN 61000-3-2:2006; EN 61000-3-3:1995 +A1:2001+A2:2005; EMC Directive 2004/108/EC; FCC (CFR 47, Part 15) Class A; EN 55024:1998+ A1:2001 + A2:2003; EN 61000-4-11:2004; EN 61000-4-8:2001	
Telecom	FCC part 68; CS-03	
Management	IMC - Intelligent Management Center; command-line interface; limited command-line interface; configuration menu; out-of-band management (RJ-45 Ethernet); SNMP Manager; Telnet; RMON1; FTP; in-line and out-of-band; modem interface; out-of-band management (serial RS-232C or Micro USB); IEEE 802.3 Ethernet MIB	
Services	3-year, parts only, global next-day advance exchange (UW075E) 3-year, 4-hour onsite, 13x5 coverage for hardware (UW076E) 3-year, 4-hour onsite, 24x7 coverage for hardware (UW006E) 3-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 SW phone support and SW updates (UW009E) 3-year, 24x7 SW phone support, software updates (UW012E) 1-year, post-warranty, 4-hour onsite, 13x5 coverage for hardware (HR554E) 1-year, post-warranty, 4-hour onsite, 24x7 coverage for hardware (HR555E) 1-year, post-warranty, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone support (HR556E) 4-year, 4-hour onsite, 13x5 coverage for hardware (UW077E) 4-year, 4-hour onsite, 24x7 coverage for hardware (UW007E) 4-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UW010E) 4-year, 24x7 SW phone support, software updates (UW013E) 5-year, 4-hour onsite, 13x5 coverage for hardware (UW078E) 5-year, 4-hour onsite, 24x7 coverage for hardware (UW008E) 5-year, 4-hour onsite, 24x7 coverage for hardware, 24x7 software phone (UW011E) 5-year, 24x7 SW phone support, software updates (UW014E)	

Technical Specifications

- 3 Yr 6 hr Call-to-Repair Onsite (UW079E)
- 4 Yr 6 hr Call-to-Repair Onsite (UW080E)
- 5 Yr 6 hr Call-to-Repair Onsite (UW081E)
- 1-year, 6 hour Call-To-Repair Onsite for hardware (HR558E)
- 1-year, 24x7 software phone support, software updates (HR557E)

Refer to the HP website at www.hp.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local HP sales office.

Standards and protocols (applies to all products in series)

BGP	RFC 2439 BGP Route Flap Damping	RFC 4273 Definitions of Managed Objects for BGP-4
RFC 1163 Border Gateway Protocol (BGP)	RFC 2547 BGP/MPLS VPNs	RFC 4274 BGP-4 Protocol Analysis
RFC 1267 Border Gateway Protocol 3 (BGP-3)	RFC 2796 BGP Route Reflection	RFC 4275 BGP-4 MIB Implementation Survey
RFC 1657 Definitions of Managed Objects for BGPv4	RFC 2842 Capability Advertisement with BGP-4	RFC 4276 BGP-4 Implementation Report
RFC 1771 BGPv4	RFC 2858 BGP-4 Multi-Protocol Extensions	RFC 4277 Experience with the BGP-4 Protocol
RFC 1772 Application of the BGP	RFC 2918 Route Refresh Capability	RFC 4360 BGP Extended Communities Attribute
RFC 1773 Experience with the BGP-4 Protocol	RFC 3065 Autonomous System Confederations for BGP	RFC 4456 BGP Route Reflection: An Alternative to Full Mesh Internal BGP (IBGP)
RFC 1774 BGP-4 Protocol Analysis	RFC 3107 Support BGP carry Label for MPLS	RFC 4724 Graceful Restart Mechanism for BGP
RFC 1965 BGP-4 confederations	RFC 3392 Capabilities Advertisement with BGP-4	RFC 4760 Multiprotocol Extensions for BGP-4
RFC 1997 BGP Communities Attribute	RFC 4271 A Border Gateway Protocol 4 (BGP-4)	
RFC 1998 PPP Gandalf FZA Compression Protocol		
Denial of service protection		
CPU DoS Protection		
Rate Limiting by ACLs		
Device management	RFC 1908 (SNMP v1/2 Coexistence)	RFC 2578-2580 SMIv2
RFC 1155 Structure and Mgmt Information (SMIv1)	RFC 1945 Hypertext Transfer Protocol -- HTTP/1.0	RFC 2579 (SMIv2 Text Conventions)
RFC 1157 SNMPv1/v2c	RFC 2271 Framework	RFC 2580 (SMIv2 Conformance)
RFC 1305 NTPv3	RFC 2573 (SNMPv3 Applications)	RFC 3416 (SNMP Protocol Operations v2)
RFC 1591 DNS (client)	RFC 2576 (Coexistence between SNMP V1, V2, V3)	RFC 3417 (SNMP Transport Mappings)
RFC 1902 (SNMPv2)		
General protocols	RFC 3036 LDP Specification	RFC 4451 BGP MULTI_EXIT_DISC (MED) Considerations
RFC 768 UDP	RFC 3037 LDP (Label Distribution Protocol) Applicability	RFC 4486 Subcodes for BGP Cease Notification Message
RFC 783 TFTP Protocol (revision 2)	RFC 3046 DHCP Relay Agent Information Option	RFC 4541 Considerations for Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) Snooping Switches
RFC 791 IP	RFC 3063 MPLS Loop Prevention Mechanism	RFC 4553 Structure-Agnostic Time
RFC 792 ICMP	RFC 3137 OSPF Stub Router Advertisement	
RFC 793 TCP	RFC 3168 The Addition of Explicit	
RFC 826 ARP		
RFC 896 Congestion Control in IP/TCP Internetworks		
RFC 917 Internet Subnets		

Technical Specifications

RFC 925 Multi-LAN Address Resolution	Congestion Notification (ECN) to IP	Division Multiplexing (TDM) over Packet (SAToP)
RFC 950 Internet Standard Subnetting Procedure	RFC 3215 LDP State Machine	RFC 4562 MAC-Forced Forwarding: A Method for Subscriber Separation on an Ethernet Access Network
RFC 951 BOOTP	RFC 3246 Expedited Forwarding PHB	RFC 4576 Using a Link State Advertisement (LSA) Options Bit to Prevent Looping in BGP/MPLS IP Virtual Private Networks (VPNs)
RFC 959 File Transfer Protocol (FTP)	RFC 3268 Advanced Encryption Standard (AES) Ciphersuites for Transport Layer Security (TLS)	RFC 4577 OSPF as the Provider/Customer Edge Protocol for BGP/MPLS IP Virtual Private Networks (VPNs)
RFC 1027 Proxy ARP	RFC 3277 IS-IS Transient Blackhole Avoidance	RFC 4594 Configuration Guidelines for DiffServ Service Classes
RFC 1048 BOOTP (Bootstrap Protocol) vendor information extensions	RFC 3279 Algorithms and Identifiers for the Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile	RFC 4601 Protocol Independent Multicast - Sparse Mode (PIM-SM): Protocol Specification (Revised)
RFC 1058 RIPv1	RFC 3280 Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile	RFC 4618 Encapsulation Methods for Transport of PPP/High-Level Data Link Control (HDLC) over MPLS Networks
RFC 1091 Telnet Terminal-Type Option	RFC 3319 Dynamic Host Configuration Protocol (DHCPv6) Options for Session Initiation Protocol (SIP) Servers	RFC 4619 Encapsulation Methods for Transport of Frame Relay over Multiprotocol Label Switching (MPLS) Networks
RFC 1093 NSFNET routing architecture	RFC 3359 Reserved Type, Length and Value (TLV) Codepoints in Intermediate System to Intermediate System	RFC 4632 Classless Inter-domain Routing (CIDR): The Internet Address Assignment and Aggregation Plan
RFC 1141 Incremental updating of the Internet checksum	RFC 3392 Support BGP capabilities advertisement	RFC 4659 BGP-MPLS IP Virtual Private Network (VPN) Extension for IPv6 VPN
RFC 1142 OSI IS-IS Intra-domain Routing Protocol	RFC 3443 Time To Live (TTL) Processing in Multi-Protocol Label Switching (MPLS) Networks	RFC 4664 Framework for Layer 2 Virtual Private Networks (L2VPNs)
RFC 1166 Internet address used by Internet Protocol (IP)	RFC 3478 Graceful Restart Mechanism for Label Distribution Protocol	RFC 4665 Service Requirements for Layer 2 Provider-Provisioned Virtual Private Networks
RFC 1191 Path MTU discovery	RFC 3479 Fault Tolerance for the Label Distribution Protocol (LDP)	RFC 4741 NETCONF Configuration Protocol
RFC 1195 OSI ISIS for IP and Dual Environments	RFC 3509 OSPF ABR Behavior	RFC 4742 Using the NETCONF Configuration Protocol over Secure SHell (SSH)
RFC 1213 Management Information Base for Network Management of TCP/IP-based internets	RFC 3526 More Modular Exponential (MODP) Diffie-Hellman groups for Internet Key Exchange (IKE)	RFC 4743 Using NETCONF over the Simple Object Access Protocol (SOAP)
RFC 1253 (OSPF v2)	RFC 3564 Requirements for Support of Differentiated Services-aware MPLS Traffic Engineering	RFC 4765 Service Requirements for Layer 2 Provider Provisioned Virtual Private Networks
RFC 1305 NTPv3 (IPv4 only)	RFC 3567 Intermediate System to Intermediate System (IS-IS) Cryptographic Authentication	RFC 4781 Graceful Restart
RFC 1321 The MD5 Message-Digest Algorithm	RFC 3584 Coexistence between Version 1 and Version 2 of the Internet-standard Network Management Framework	
RFC 1323 TCP Extensions for High Performance		
RFC 1349 Type of Service		
RFC 1350 TFTP Protocol (revision 2)		
RFC 1449 Transport Mappings for version 2 of the Simple Network Management Protocol (SNMPv2)		
RFC 1519 CIDR		
RFC 1542 BOOTP Extensions		
RFC 1542 Clarifications and Extensions for the Bootstrap Protocol		
RFC 1624 Incremental Internet Checksum		
RFC 1631 NAT		
RFC 1701 Generic Routing Encapsulation		

Technical Specifications

RFC 1702 Generic Routing Encapsulation over IPv4 networks	RFC 3602 The AES-CBC Cipher Algorithm and Its Use with IPsec	Mechanism for BGP with MPLS
RFC 1721 RIP-2 Analysis	RFC 3612 Applicability Statement for Restart Mechanisms for the Label Distribution Protocol (LDP)	RFC 4787 Network Address Translation (NAT) Behavioral Requirements for Unicast UDP
RFC 1722 RIP-2 Applicability	RFC 3623 Graceful OSPF Restart	RFC 4798 Connecting IPv6 Islands over IPv4 MPLS Using IPv6 Provider Edge Routers (6PE)
RFC 1723 RIP v2	RFC 3646 DNS Configuration options for Dynamic Host Configuration Protocol for IPv6 (DHCPv6)	RFC 4811 OSPF Out-of-Band Link State Database (LSDB) Resynchronization
RFC 1724 RIP Version 2 MIB Extension	RFC 3662 A Lower Effort Per-Domain Behavior (PDB) for Differentiated Services	RFC 4812 OSPF Restart Signaling
RFC 1777 Lightweight Directory Access Protocol	RFC 3704 Unicast Reverse Path Forwarding (URPF)	RFC 4813 OSPF Link-Local Signaling
RFC 1812 IPv4 Routing	RFC 3706 A Traffic-Based Method of Detecting Dead Internet Key Exchange (IKE) Peers	RFC 4816 Pseudowire Emulation Edge-to-Edge (PWE3) Asynchronous Transfer Mode (ATM) Transparent Cell Transport Service
RFC 1825 Security Architecture for the Internet Protocol	RFC 3719 Recommendations for Interoperable Networks using Intermediate System to Intermediate System (IS-IS)	RFC 4835 Cryptographic Algorithm Implementation Requirements for Encapsulating Security Payload (ESP) and Authentication Header (AH)
RFC 1826 IP Authentication Header	RFC 3736 Stateless Dynamic Host Configuration Protocol (DHCP) Service for IPv6	RFC 4861 Neighbor Discovery for IP version 6 (IPv6)
RFC 1827 IP Encapsulating Security Payload (ESP)	RFC 3768 Virtual Router Redundancy Protocol (VRRP)	RFC 4862 IPv6 Stateless Address Autoconfiguration
RFC 1829 The ESP DES-CBC Transform	RFC 3782 The NewReno Modification to TCP's Fast Recovery Algorithm	RFC 4878 "Definitions and Managed Objects for Operations, Administration, and Maintenance (OAM) Functions on
RFC 1945 Hypertext Transfer Protocol -- HTTP/1.0	RFC 3786 Extending the Number of IS-IS LSP Fragments Beyond the 256 Limit	RFC 4893 BGP Support for Four-octet AS Number Space
RFC 1966 BGP Route Reflection An alternative to full mesh IBGP	RFC 3787 Recommendations for Interoperable IP Networks using Intermediate System to Intermediate System (IS-IS)	RFC 4940 IANA Considerations for OSPF
RFC 1981 Path MTU Discovery for IP version 6	RFC 3810 Multicast Listener Discovery Version 2 (MLDv2) for IPv6	RFC 4941 Privacy Extensions for Stateless Address Autoconfiguration in IPv6
RFC 2003 IP Encapsulation within IP	RFC 3812 Multiprotocol Label Switching (MPLS) Traffic Engineering (TE) Management Information Base (MIB)	RFC 5007 DHCPv6 Leasequery
RFC 2018 TCP Selective Acknowledgement Options	RFC 3815 Definitions of Managed Objects for the Multiprotocol Label Switching (MPLS), Label Distribution Protocol (LDP)	RFC 5036 LDP Specification
RFC 2082 RIP-2 MD5 Authentication	RFC 3847 Restart signaling for IS-IS	RFC 5065 Autonomous System Confederations for BGP
RFC 2104 HMAC: Keyed-Hashing for Message Authentication	RFC 3916 Requirements for	RFC 5086 Structure-Aware Time Division Multiplexed (TDM) Circuit Emulation Service over Packet Switched Network (CESoPSN)
RFC 2131 DHCP		RFC 5095 Deprecation of Type 0 Routing Headers in IPv6
RFC 2132 DHCP Options and BOOTP Vendor Extensions		RFC 5130 A Policy Control Mechanism in IS-IS Using Administrative Tags
RFC 2138 Remote Authentication Dial In User Service (RADIUS)		
RFC 2236 IGMP Snooping		
RFC 2246 The TLS Protocol Version 1.0		
RFC 2251 Lightweight Directory Access Protocol (v3)		
RFC 2252 Lightweight Directory Access Protocol (v3): Attribute Syntax Definitions		
RFC 2283 MBGP		
RFC 2309 Recommendations on queue management and congestion avoidance in the Internet		
RFC 2338 VRRP		
RFC 2451 The ESP CBC-Mode		

Technical Specifications

Cipher Algorithms	Pseudo-Wire Emulation Edge-to-Edge (PWE3)	RFC 5187 OSPFv3 Graceful Restart
RFC 2453 RIPv2	RFC 3948 UDP Encapsulation of IPsec ESP Packets	RFC 5214 Intra-Site Automatic Tunnel Addressing Protocol (ISATAP)
RFC 2474 Definition of the Differentiated Services Field (DS Field) in the IPv4 and IPv6 Headers	RFC 3973 Protocol Independent Multicast - Dense Mode (PIM-DM): Protocol Specification (Revised)	RFC 5254 Requirements for Multi-Segment Pseudowire Emulation Edge-to-Edge (PWE3)
RFC 2510 Internet X.509 Public Key Infrastructure Certificate Management Protocols	RFC 3985 Pseudo Wire Emulation Edge-to-Edge (PWE3) Architecture	RFC 5277 NETCONF Event Notifications
RFC 2519 A Framework for Inter-Domain Route Aggregation	RFC 4061 Benchmarking Basic OSPF Single Router Control Plane Convergence	RFC 5280 Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile
RFC 2529 Transmission of IPv6 over IPv4 Domains without Explicit Tunnels	RFC 4062 OSPF Benchmarking Terminology and Concepts	RFC 5286 Basic Specification for IP Fast Reroute: Loop-Free Alternates
RFC 2548 (MS-RAS-Vendor only)	RFC 4063 Considerations When Using Basic OSPF Convergence Benchmarks	RFC 5287 Control Protocol Extensions for the Setup of Time-Division Multiplexing (TDM) Pseudowires in MPLS Networks
RFC 2581 TCP Congestion Control	RFC 4109 Algorithms for Internet Key Exchange version 1 (IKEv1)	RFC 5301 Dynamic Hostname Exchange Mechanism for IS-IS
RFC 2597 Assured Forwarding PHB Group	RFC 4133 Entity MIB (Version 3)	RFC 5302 Domain-Wide Prefix Distribution with Two-Level IS-IS
RFC 2598 An Expedited Forwarding PHB	RFC 4182 Removing a Restriction on the use of MPLS Explicit NULL	RFC 5304 Intermediate System to Intermediate System (IS-IS) Cryptographic Authentication
RFC 2616 HTTP Compatibility v1.1	RFC 4214 Intra-Site Automatic Tunnel Addressing Protocol (ISATAP)	RFC 5306 Restart Signaling for IS-IS
RFC 2661 L2TP	RFC 4222 Prioritized Treatment of Specific OSPF Version 2 Packets and Congestion Avoidance	RFC 5308 Routing IPv6 with IS-IS
RFC 2663 NAT Terminology and Considerations	RFC 4250 The Secure Shell (SSH) Protocol Assigned Numbers	RFC 5309 Point-to-Point Operation over LAN in Link State Routing Protocols
RFC 2694 DNS extensions to Network Address Translators (DNS_ALG)	RFC 4251 The Secure Shell (SSH) Protocol Architecture	RFC 5381 Experience of Implementing NETCONF over SOAP
RFC 2698 A Two Rate Three Color Marker	RFC 4252 The Secure Shell (SSH) Authentication Protocol	RFC 5382 The IP Network Address Translator (NAT)
RFC 2716 PPP EAP TLS Authentication Protocol	RFC 4253 The Secure Shell (SSH) Transport Layer Protocol	RFC 5398 Autonomous System (AS) Number Reservation for Documentation Use
RFC 2747 RSVP Cryptographic Authentication	RFC 4254 The Secure Shell (SSH) Connection Protocol	RFC 5492 Capabilities Advertisement with BGP-4
RFC 2763 Dynamic Name-to-System ID mapping	RFC 4291 IP Version 6 Addressing Architecture	RFC 5508 NAT Behavioral Requirements for ICMP
RFC 2784 Generic Routing Encapsulation (GRE)	RFC 4305 Cryptographic Algorithm Implementation Requirements for Encapsulating Security Payload (ESP) and Authentication Header (AH)	RFC 5539 NETCONF over Transport Layer Security (TLS)
RFC 2827 Network Ingress Filtering: Defeating Denial of Service Attacks Which Employ IP Source Address Spoofing	RFC 4364 BGP/MPLS IP Virtual Private Networks (VPNs)	RFC 5613 OSPF Link-Local Signaling
RFC 2865 Remote Authentication Dial In User Service (RADIUS)	RFC 4365 Applicability Statement for BGP/MPLS IP Virtual Private Networks (VPNs)	RFC 5659 An Architecture for Multi-Segment Pseudowire Emulation Edge-to-Edge
RFC 2866 RADIUS Accounting	RFC 4381 Analyses of the Security	
RFC 2868 RADIUS Attributes for Tunnel Protocol Support		
RFC 2869 RADIUS Extensions		
RFC 2884 Performance Evaluation of Explicit Congestion Notification (ECN) in IP Networks.		
RFC 2963 A Rate Adaptive Shaper for Differentiated Services		

Technical Specifications

RFC 2966 Domain-wide Prefix Distribution with Two-Level IS-IS	of BGP/MPLS IP VPNs	RFC 5798 Virtual Router Redundancy Protocol (VRRP) Version 3 for IPv4 and IPv6
RFC 2973 IS-IS Mesh Groups	RFC 4382 MPLS/BGP Layer 3 Virtual Private Network (VPN) Management Information Base	RFC 5880 Bidirectional Forwarding Detection
RFC 2993 Architectural Implications of NAT	RFC 4385 Pseudowire Emulation Edge-to-Edge (PWE3) Control Word for Use over an MPLS PSN	RFC 5881 BFD for IPv4 and IPv6 (Single Hop)
RFC 3011 The IPv4 Subnet Selection Option for DHCP	RFC 4419 Diffie-Hellman Group Exchange for the Secure Shell (SSH) Transport Layer Protocol	RFC 5882 Generic Application of BFD
RFC 3022 Traditional IP Network Address Translator (Traditional NAT)	RFC 4446 IANA Allocations for Pseudowire Edge to Edge Emulation (PWE3)	RFC 5883 BFD for Multihop Paths
RFC 3027 Protocol Complications with the IP Network Address Translator	RFC 4447 Pseudowire Setup and Maintenance Using the Label Distribution Protocol (LDP)	RFC 5905 Network Time Protocol Version 4: Protocol and Algorithms Specification
RFC 3031 Multiprotocol Label Switching Architecture	RFC 4448 Encapsulation Methods for Transport of Ethernet over MPLS Networks	RFC 854 Telnet Protocol Specification
RFC 3032 MPLS Label Stack Encoding	RFC 2934 Protocol Independent Multicast MIB for IPv4	RFC 856 Telnet Binary Transmission
IP multicast	RFC 3376 IGMPv3	RFC 3376 IGMPv3 (host joins only)
RFC 1112 IGMP	RFC 2529 Transmission of IPv6 Packets over IPv4	RFC 5059 Bootstrap Router (BSR) Mechanism for Protocol Independent Multicast (PIM)
RFC 2362 PIM Sparse Mode	RFC 2545 Use of MP-BGP-4 for IPv6	RFC 2893 Transition Mechanisms for IPv6 Hosts and Routers
RFC 2710 Multicast Listener Discovery (MLD) for IPv6	RFC 2553 Basic Socket Interface Extensions for IPv6	RFC 3056 Connection of IPv6 Domains via IPv4 Clouds
IPv6	RFC 2740 OSPFv3 for IPv6	RFC 3162 RADIUS and IPv6
RFC 2080 RIPng for IPv6	RFC 2012 SNMPv2 MIB for TCP	RFC 3315 DHCPv6 (client and relay)
RFC 2460 IPv6 Specification	RFC 2013 SNMPv2 MIB for UDP	RFC 5340 OSPF for IPv6
RFC 2473 Generic Packet Tunneling in IPv6	RFC 2096 IP Forwarding Table MIB	RFC 2573 SNMP-Notification MIB
RFC 2475 IPv6 DiffServ Architecture	RFC 2233 Interfaces MIB	RFC 2574 SNMP USM MIB
MIBs	RFC 2273 SNMP-NOTIFICATION-MIB	RFC 2674 802.1p and IEEE 802.1Q Bridge MIB
RFC 1213 MIB II	RFC 2571 SNMP Framework MIB	RFC 2737 Entity MIB (Version 2)
RFC 1493 Bridge MIB	RFC 2572 SNMP-MPD MIB	RFC 2863 The Interfaces Group MIB
RFC 1724 RIPv2 MIB	RFC 1906 SNMPv2 Transport Mappings	RFC 3813 MPLS LSR MIB
RFC 1850 OSPFv2 MIB	RFC 1908 Coexistence between Version 1 and Version 2 of the Internet-standard Network Management Framework	RFC 2273 SNMPv3 Applications
RFC 1907 SNMPv2 MIB	RFC 1918 Private Internet Address Allocation	RFC 2274 USM for SNMPv3
RFC 2011 SNMPv2 MIB for IP	RFC 2037 Entity MIB using SMIv2	RFC 2275 VACM for SNMPv3
Network management	RFC 2261 An Architecture for	RFC 2575 SNMPv3 View-based Access Control Model (VACM)
IEEE 802.1D (STP)		RFC 3164 BSD syslog Protocol
RFC 1098 Simple Network Management Protocol (SNMP)		RFC 3411 An Architecture for Describing Simple Network Management Protocol (SNMP) Management Frameworks
RFC 1158 Management Information Base for network management of TCP/IP-based internets: MIB-II		
RFC 1212 Concise MIB definitions		
RFC 1215 Convention for defining		

Technical Specifications

traps for use with the SNMP	Describing SNMP Management Frameworks	RFC 3412 Message Processing and Dispatching for the Simple Network Management Protocol (SNMP)
RFC 1389 RIPv2 MIB Extension	RFC 2262 Message Processing and Dispatching for the Simple Network Management Protocol (SNMP)	RFC 3413 Simple Network Management Protocol (SNMP) Applications
RFC 1448 Protocol Operations for version 2 of the Simple Network Management Protocol (SNMPv2)	RFC 2263 SNMPv3 Applications	RFC 3414 SNMPv3 User-based Security Model (USM)
RFC 1450 Management Information Base (MIB) for version 2 of the Simple Network Management Protocol (SNMPv2)	RFC 2264 User-based Security Model (USM) for version 3 of the Simple Network Management Protocol (SNMPv3)	RFC 3415 View-based Access Control Model (VACM) for the Simple Network Management Protocol (SNMP)
RFC 1902 Structure of Management Information for Version 2 of the Simple Network Management Protocol (SNMPv2)	RFC 2265 View-based Access Control Model (VACM) for the Simple Network Management Protocol (SNMP)	RFC 3418 Management Information Base (MIB) for the Simple Network Management Protocol (SNMP)
RFC 1903 SNMPv2 Textual Conventions	RFC 2272 SNMPv3 Management Protocol	
RFC 1904 SNMPv2 Conformance		
RFC 1905 SNMPv2 Protocol Operations		
OSPF	RFC 1587 OSPF NSSA	RFC 2328 OSPFv2
RFC 1245 OSPF protocol analysis	RFC 1765 OSPF Database Overflow	RFC 2370 OSPF Opaque LSA Option
RFC 1246 Experience with OSPF	RFC 1850 OSPFv2 Management Information Base (MIB), traps	RFC 3101 OSPF NSSA
RFC 1583 OSPFv2		
QoS/CoS	RFC 2598 DiffServ Expedited Forwarding (EF)	RFC 3247 Supplemental Information for the New Definition of the EF PHB (Expedited Forwarding Per-Hop Behavior)
IEEE 802.1P (CoS)	RFC 2697 A Single Rate Three Color Marker	RFC 3260 New Terminology and Clarifications for DiffServ
RFC 2474 DS Field in the IPv4 and IPv6 Headers	RFC 3168 The Addition of Explicit Congestion Notification (ECN) to IP	
RFC 2475 DiffServ Architecture		
RFC 2597 DiffServ Assured Forwarding (AF)		
Security	RFC 2408 Internet Security Association and Key Management Protocol (ISAKMP)	RFC 2818 HTTP Over TLS
IEEE 802.1X Port Based Network Access Control	RFC 2409 The Internet Key Exchange (IKE)	FC 2865 RADIUS Authentication
RFC 2082 RIP-2 MD5 Authentication	RFC 2412 The OAKLEY Key Determination Protocol	RFC 2866 RADIUS Accounting
RFC 2104 Keyed-Hashing for Message Authentication	RFC 2459 Internet X.509 Public Key Infrastructure Certificate and CRL Profile	RFC 3579 RADIUS Support For Extensible Authentication Protocol (EAP)
RFC 2138 RADIUS Authentication		RFC 3580 IEEE 802.1X Remote Authentication Dial In User Service (RADIUS) Usage Guidelines
RFC 2139 RADIUS Accounting		
VPN	RFC 2405 The ESP DES-CBC Cipher Algorithm With Explicit IV	RFC 3948 - UDP Encapsulation of IPsec ESP Packets
RFC 1828 IP Authentication using Keyed MD5	RFC 2406 IP Encapsulating Security Payload (ESP)	RFC 4301 - Security Architecture for the Internet Protocol
RFC 1853 IP in IP Tunneling	RFC 2407 The Internet IP Security Domain of Interpretation for ISAKMP	RFC 4302 - IP Authentication Header (AH)
RFC 2401 Security Architecture for the Internet Protocol	RFC 2410 The NULL Encryption Algorithm and Its Use With IPsec	RFC 4303 - IP Encapsulating Security Payload (ESP)
RFC 2402 IP Authentication Header	RFC 2411 IP Security Document Roadmap	RFC 4305 - Cryptographic Algorithm Implementation Requirements for ESP and AH
RFC 2403 The Use of HMAC-MD5-96 within ESP and AH		
RFC 2404 The Use of HMAC-SHA-1-96 within ESP and AH		

Accessories

HP MSR4000 Router Series accessories

Transceivers

HP X110 100M SFP LC FX Transceiver	JD102B
HP X110 100M SFP LC LX Transceiver	JD120B
HP X110 100M SFP LC LH40 Transceiver	JD090A
HP X110 100M SFP LC LH80 Transceiver	JD091A
HP X120 1G SFP LC SX Transceiver	JD118B
HP X120 1G SFP LC LX Transceiver	JD119B
HP X125 1G SFP LC LH40 1310nm Transceiver	JD061A
HP X120 1G SFP LC LH40 1550nm Transceiver	JD062A
HP X125 1G SFP LC LH70 Transceiver	JD063B
HP X120 1G SFP LC LH100 Transceiver	JD103A
HP X120 1G SFP LC BX 10-U Transceiver	JD098B
HP X120 1G SFP LC BX 10-D Transceiver	JD099B
HP X130 10G SFP+ LC LRM Transceiver	JD093B
HP X130 10G SFP+ LC ER 40km Transceiver	JG234A
HP X240 10G SFP+ to SFP+ 0.65m Direct Attach Copper Cable	JD095C
HP X240 10G SFP+ to SFP+ 1.2m Direct Attach Copper Cable	JD096C
HP X240 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	JD097C
HP X240 10G SFP+ to SFP+ 5m Direct Attach Copper Cable	JG081C

Cables

HP X200 V.24 DTE 3m Serial Port Cable	JD519A
HP X200 V.24 DCE 3m Serial Port Cable	JD521A
HP X200 V.35 DTE 3m Serial Port Cable	JD523A
HP X200 V.35 DCE 3m Serial Port Cable	JD525A
HP X200 X.21 DTE 3m Serial Port Cable	JD527A
HP X200 X.21 DCE 3m Serial Port Cable	JD529A
HP X260 RS449 3m DTE Serial Port Cable	JF825A
HP X260 RS449 3m DCE Serial Port Cable	JF826A
HP X260 RS530 3m DTE Serial Port Cable	JF827A
HP X260 RS530 3m DCE Serial Port Cable	JF828A
HP X260 Auxiliary Router Cable	JD508A
HP X260 E1 RJ45 3m Router Cable	JD509A
HP X260 E1 RJ45 20m Router Cable	JD517A
HP X260 E1 (2) BNC 75 ohm 3m Router Cable	JD175A
HP X260 E1 BNC 20m Router Cable	JD514A
HP X260 E1 2 BNC 75 ohm 40m Router Cable	JD516A
HP X260 E1 RJ45 BNC 75-120 ohm Conversion Router Cable	JD511A
HP X260 T1 Router Cable	JD518A
HP X260 T1 Voice Router Cable	JD535A
HP X260 8E1 BNC 75 ohm 3m Router Cable	JD512A
HP X260 T3/E3 Router Cable	JD531A
HP X260 E3-30 E3/T3 Router Cable	JD533A

Power Supply



Accessories

NEW HP X351 300W 100-240VAC to 12VDC Power Supply	JG527A
Router Modules	
NEW HP MSR4000 MPU-100 Main Processing Unit	JG412A
NEW HP MSR4000 SPU-100 Service Processing Unit	JG413A
NEW HP MSR4000 SPU-200 Service Processing Unit	JG414A
NEW HP MSR G2 128-channel Voice Processing Module	JG417A
NEW HP MSR 1-port E1 Voice HMIM Module	JG429A
NEW HP MSR 2-port E1 Voice HMIM Module	JG431A
NEW HP MSR 1-port T1 Voice HMIM Module	JG430A
NEW HP MSR 4-port FXS HMIM Module	JG446A
NEW HP MSR 4-port FXO HMIM Module	JG447A
NEW HP MSR 4-port E and M HMIM Module	JG448A
NEW HP MSR 4-port Enhanced Sync/Async Serial HMIM Module	JG442A
NEW HP MSR 8-port Enhanced Sync/Async Serial HMIM Module	JG443A
NEW HP MSR 2-port E1/CE1/PRI HMIM Module	JG450A
NEW HP MSR 4-port E1/CE1/PRI HMIM Module	JG451A
NEW HP MSR 4-port E1/Fractional E1 HMIM Module	JG453A
NEW HP MSR 8-port E1/CE1/PRI (75ohm) HMIM Module	JG452A
NEW HP MSR 2-port T1/CT1/PRI HMIM Module	JG456A
NEW HP MSR 4-port T1/Fractional T1 HMIM Module	JG457A
NEW HP MSR 1-port E3/CE3/FE3 HMIM Module	JG436A
NEW HP MSR 1-port T3/CT3/FT3 HMIM Module	JG435A
NEW HP MSR 1-port OC-3c/STM-1c POS HMIM Module	JG438A
NEW HP MSR 0.5U HMIM Adapter Module	JG415A
NEW HP MSR 1U HMIM Adapter Module	JG416A
Memory	
HP X600 1G Compact Flash Card	JC684A
HP X600 512M Compact Flash Card	JC685A
HP X600 256M Compact Flash Card	JC686A
NEW HP X610 2GB DDR3 SDRAM UDIMM Memory	JG529A
NEW HP X610 4GB DDR3 SDRAM UDIMM Memory	JG530A

To learn more, visit: www.hp.com/networking

© Copyright 2014 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.