


ELECIRCAL CHARACTER

- 100% OPEN&SHORT TESTING
- WITHSTANDING VOLTAGE: DC 300V 10MS
- INSULATION RESISTANCE: 5M OHMS(MIN)
- CONDUCTIVE RESISTANCE: 5 OHMS(MQX)
- ALL MATERIAL MUST MEET ROHS REQUIRENTS

PIN OUT

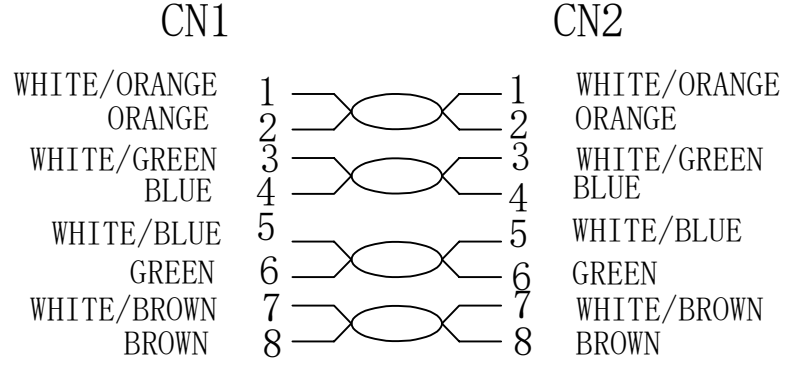

MATERIAL LIST:

NO.	PARTS. NAME	SPECIFICATION STANDARD	QT' Y	REMARK	APPRO BY	CHECK BY	DRAWN BY	SCALE	MM
③	OUTER MOLD	75A PVC COLOR SAME AS THE JACKET OF THE CABLE	11	g	DRAWING	B-UTP503R	PART NAME	PATCH CABLE UTP CAT 5	
②	PLUG	RG45 8P8CS, Six Ascending Two Down, CAT5 PIN Plated Gold FU"	2	PCS	CUSTOMER		ICON	TOLERANCE X. ± 0.5	
①	CABLE	UTP CAT 5E 26AWG 7/0.16CCA 4*2P OD4.5±0.2mm PVC Printing:UTP CAT5E 26AWG PATCH CORD ISO 11801 EIA/TIA 568B	L	M	CUSTOMER'S ITEM	LY-UTP5R-SR		.X ± 0.3	
					APPRO BY	CHECK BY	DRAWN BY	SCALE	MM
					Wanjiuchao	wjc	Jason	PAGE	1/1