


REVISION RECORD MODIFICATIONS	DATE	REV.
NEW	2020/10/30	A/0

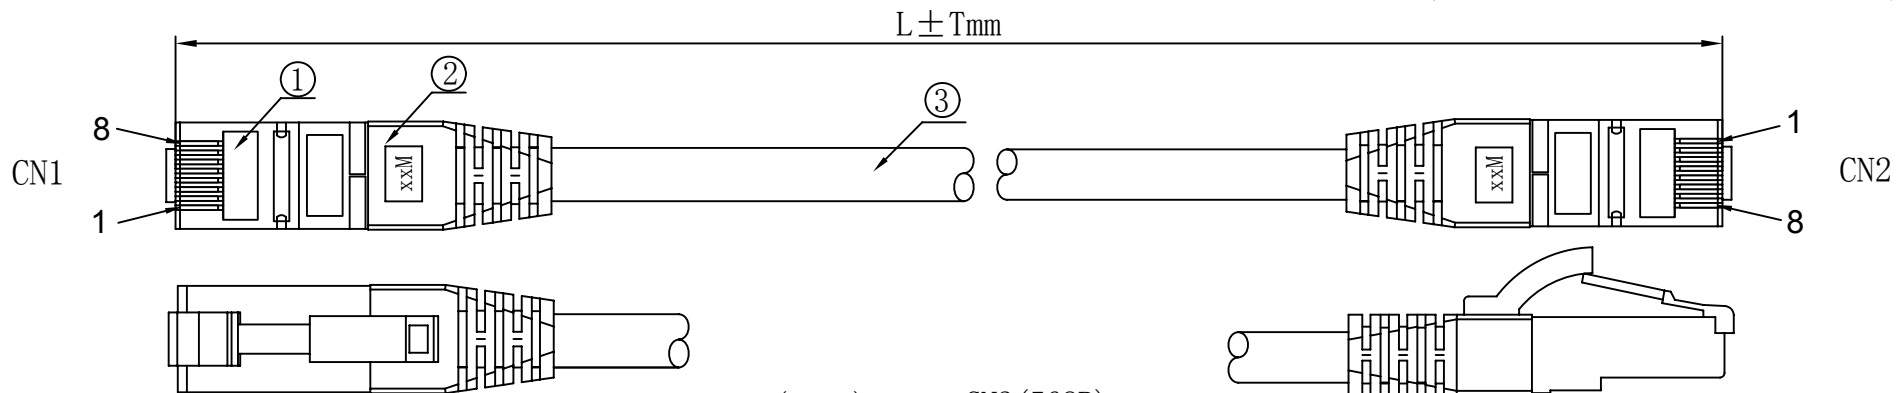

NOTE:

1. Electrical test:


- (1). 100% open short & miss wire test;
- (2). Insulation resistance: DC300V 10M ohm;
- (3). Conductor resistance: * ohm/M;
- (4). Dielectric strength: 200V AC/Sec, 1mA.

2. RoHS COMPLIANT

3. Fluke Cat6 Channel Link Pass

4. Print on cable:

MicroConnect Patchcable U/UTP CAT6 250MHz - 4x2xAWG24 LSZH Halogenfree

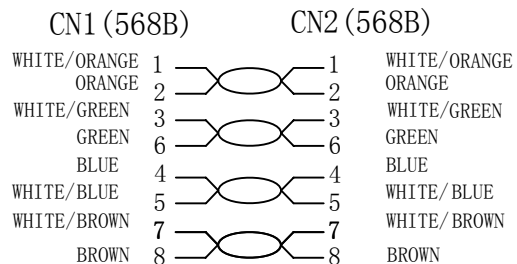

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK
③	CABLE	UTP 7/0.175BC*2P*4+Cross, LOSH, OD=5.8±0.2MM	1	
②	OVER MOLD	PVC 75	2	
①	CONNECTOR	Cat6 8P8C, Pin FU Gold plated	2	

DRAW NO.		PRODUCT NAME	Cat6 UTP Patch cable, LOSH	
CUSTOMER		VIEW	Tolerance	
ITEM NO.	UTP615		X.	±1.00
			X.X	±0.50
APPOBY	CHECKBY	DRAWNBY	UNTT	MM
			Page	1 of 1