

Created to keep up with you.

Working on the go becomes premium with the ThinkVision M14t Gen 2 Monitor. Carry it around with you becomes effortless with its lightweight and slim design. Irrespective of where you may be, the large 14-inch screen with its 16:10 screen ratio lets you stay productive in a portable form factor. Create content as per your preferences with the flexibility of using 10-point touch that has over 4,096 levels of pressure. Content looks vivid on the 2240 x 1400 resolution monitor with its 100% sRGB color space coverage.





wnerever you go

Get more work done, wherever you go, on the Thinkvision M14t Gen 2 Monitor with its 14-inch, 16:10 aspect ratio display that offers 5.64% more active area than a traditional FHD monitor. Enjoy vivid looking visuals with the panel's 300 nits brightness, 2240 x 1400 resolution, 1500:1 contrast ratio, and 100% sRGB color space coverage. Sharing your work with others becomes easier with the wide viewing angles of the In-Plane Switching (IPS) panel. As you work, the TÜV Rheinland certified Natural Low Blue Light technology keeps your eyes stay protected without distorting colors.



Designed with portability in mind

hinkVision

Carrying and using the display on the go is a breeze with its under 700 g lightweight¹, and 4.6 mm super-slim design. Work comfortably with the display's wide range of adjustability (0-90° tilt, 90° pivot, up to 11 mm lift). Switching between portrait and landscape is also seamless with the L-shaped dongle and on-board auto-rotation sensors. Access the display's brightness, contrast and other related settings with ease using the on-screen-display (OSD) menu.




Feather light 700 g lightweight



Height-adjustable

Kickstand

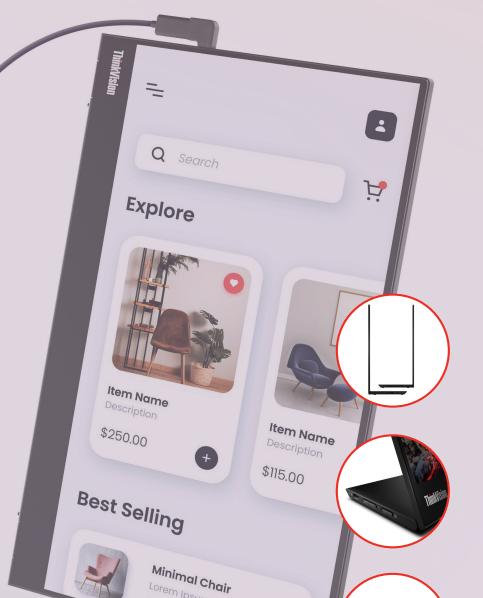






Auto-rotation Seamlessly switch between portrait and landscape

On-screen-display

P

(OSD) menu Easy access to brightness, contrast & auto rotation settings

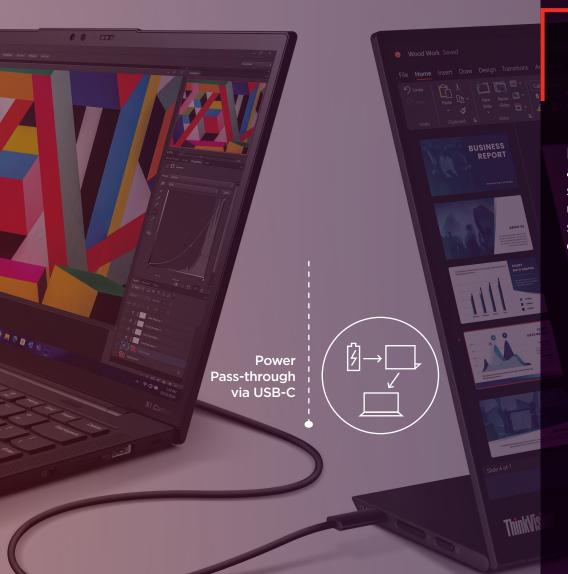



Lorem Ipsum

\$125.00

Leverage the 10-point touch-enabled display to drag and drop, draw or annotate on your content. The touch solutions have up to 4,096 levels of pressure, making the use of the screen more intuitive than ever. Charging the screen, or extending it to your laptop or smartphone² is easy with the Dual USB-C³ interface.



Touch-enabled 10-point touch enabled display

Digital Pen⁴ Lenovo Digital Pen with 4,096 levels of pressure



Ports **Dual USB-C interfaces** with full functionality (data, media capability)



Power pass-through Charge the device via AC/DC adapter⁵

Lenovo ThinkVision M14t Gen 2 Monitor

Specifications

Display

Panel Size 14-inch

Screen Dimensions 306.6 mm x 204.5 mm

Panel Type In-Plane Switching (IPS)

Power

Power Consumption (Typ. / Max) 8.0W / 9.5W

Power Consumption Sleep/Off Mode < 0.3W

Power Consumption Switch-off Mode < 0.3W

What's in the Box

Monitor with Stand Yes

USB Cable (Cable Length) 1 x USB Type-C to Type-C Gen 1 Cable (1 m, 5 Gbps)

Quick Setup Guide Yes

Active Area 301.6 mm x 188.5 mm

Backlight WLED

Aspect Ratio 16:10

Resolution 2240 x 1400

Pixel Pitch 0.1346 mm x 0.1346 mm

Dot/Pixel Per Inch (DPI/PPI) 189

Viewing Angle (H x V @ CR 10:1) 178° / 178°

Response Time 6ms (Extreme Mode), 8ms (Normal Mode)

Refresh Rate 60 Hz

Brightness (Typical, Panel) 300 cd/m²

Brightness (Typical, Set) 270 cd/m²

Contrast Ratio (Typical) 1500:1

Dynamic Contrast Ratio (Typical) 3M:1

Color Gamut (Coverage Ratio) 100% sRGB (CIE 1931)

Color Gamut (Color Area Ratio) 100% sRGB

Color Support (Typical) 16.7 Million

Color Depth 8-bit

Touch Yes (10-point Capacitive Touch Panel)

Connectivity

Video Signal 2 x USB Type-C (DP 1.2 Alt Mode)

USB Hub Yes

Special Features

Software Lenovo Accessories and Display Manager⁶

Natural Low Blue Light Yes

Pen/Digitizer Yes (Passive)

ENERGY STAR Power Consumption (Pon $/ E_{TEC}$) 6.8W / 23.6kWh

Power Supply External

Upstream Power Delivery⁷ Up to 65W

Voltage Required DC 5V to 20V

Mechanical

Tilt Angle (Front / Back) 0° / 90°

Lift (Max. Range) 11.0 mm

Pivot -90° / 90°

VESA Hole Capability (2 Holes) Yes (100 mm)

Kensington Lock Slot Yes (2.5 mm x 6 mm)

Cable Management Yes

The Minimum Thickness of Head 4.6 mm

Bezel Width (Side) 6.1 mm

Bezel Width (Top) 6.1 mm

Bezel Width (Bottom) 27.5 mm

Dimension

Size Packed (W x D x H, mm/inch) 384.0 x 76.0 x 277.0 mm 15.12 x 2.99 x 10.91 inches

Size Unpacked w/ Stand (Highest Position) (W x D x H, mm/inch) <u>314.8 x 96.4 x 235.</u>3 mm 12.39 x 3.80 x 9.26 inches

Size Unpacked w/ Stand (Lowest Position) (W x D x H, mm/inch) 314.8 x 96.7 x 224.3 mm 12.39 x 3.81 x 8.83 inches

Weight Packed (kg / lb) 1.9 kg / 4.2 lbs.

Weight Unpacked (kg / lb) 0.7 kg / 1.5 lbs.

Tools 2 x Clips

Others 1 x Protect Bag and Touch Pen and L-Shape Dongle

Certification

ENERGY STAR Certification Yes

CCC Yes

EPEAT Gold

Volatile Organic Compound Certification Yes

RoHS (2011/65/EU) Yes

Windows Certification Windows 10, Windows 11

EU Energy Level Certification Yes (Level-C)

TÜV Rheinland Low Blue Light Yes

TÜV Low Blue Light (Hardware Solution) Yes

Eyesafe Display Certification Yes (Eyesafe 2.0)







¹ Actual weight may vary due to components, manufacturing process and options. |² Extending screen can only work when the M14t Gen 2 connects with a compatible USB-C laptop or when the smartphone's OS supports it. | ³ USB Type-C* and USB-C* are registered trademarks of USB Implementers Forum. |⁴ Passive stylus is included; Active stylus is sold separately. | ⁵ AC/DC adapter is sold separately. | ⁶ Formerly Lenovo Display Control Center. Supports Windows 10 & 11, Mac OS, Windows On Arm (functions vary across systems). | ⁷ Listed as maximum capacity of power delivery. Actual capacity may vary depending upon devices connected or monitor configuration, and may decline with downstream USB ports connected or higher brightness setting

© 2024 Lenovo. All rights reserved. Depending on many factors such as the processing capability of peripheral devices, file attributes, and other factors related to system configuration and operating environments, the actual transfer rate using the various USB connectors on this device will vary and is typically slower than the data rates as defined by the respective USB specifications: - 5 Gbit/s for USB 3.1 Gen1; 10 Gbit/s for USB 3.1 Gen2 & 20 Gbit/s for USB 3.2. These asing the various USB connectors on this device will vary and is typically slower than the data rates as defined by the respective USB specifications: - 5 Gbit/s for USB 31 Gen; 10 Gbit/s for USB 31 Gen; 20 Gbit/s for USB 32. These products are available while supplies last. Prices shown are subject to change without notice. For any questions concerning price, please contact your Lenovo Account Executive. Lenovo is not responsible for photographic or typographic errors. Warranty: For a copy of applicable warranties, write to: Warranty Information, 500 Park Offices Drive, RTP, NC 27709, Attn: Dept. ZPYA/B600. Lenovo makes no representation or warranty regarding third-party products or services. Trademarks of Microsoft Corporation. Intel, the Intel logo, Intel Core, and Core Inside are trademarks of Intel Corporation in the U.S. and/or other countries. Other company, product, and service names may be trademarks or service marks of others.