


7	6	5	4	3	2	1		
			ECN NO.	REV	DESCRIPTION	DATE	REVISER	APPROVED

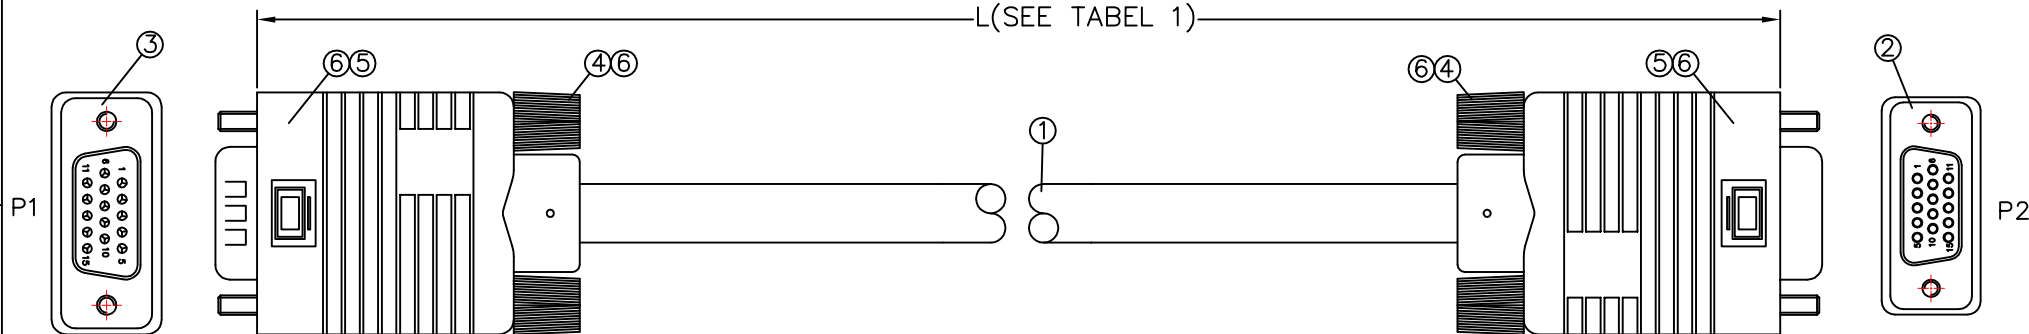

PIN ASSIGNMENT:

P1		P2	
1	红同轴导体	1	12
2	绿同轴导体	2	13
3	蓝同轴导体	3	14
	红同轴地线		15
6+7+8	绿同轴地线	6+7+8	SHELL
	蓝同轴地线		SHELL
4		4	
5		5	
9		9	
10		10	
11		11	

TABLE 1

PART NO.(BLACK):	LENGTH(L)
MONGH3B	3000±30

ELECTRICAL CHARACTER:
1.100% OPEN & SHORT TESTING.

PRINT: AWM STYLE 2919 VW-1 80℃ 30V LOW VOLTAGE COMPUTER CABLE

GENERAL TOLERANCES
(UNLESS SPECIFIED)

CUST PART NO.:



ITEM	DESCRIPTION	UNIT	QT'Y
6	PVC: BLACK	g	15
5	PE: LD-PE.	g	8
4	SCREW: NICKEL PLATED.	g	4
3	CONN: HDB 15P M,CONTACT:GOLD PLATED,SHELL:GOLD PLATED, BLUE INSULATOR.	PCS	1
2	CONN: HDB 15P F,CONTACT:GOLD PLATED,SHELL:GOLD PLATED, BLUE INSULATOR.	PCS	1
1	CABLE: 3C/28(7*0.12BC)+10*0.10TC 9C/28(7*0.12BC)+AL D28AWG(7*0.12AS)+96*0.12AL-MG,OD: 8.0, JACKET COLOR: BLACK.	mm	SEE TABLE 1

.XXX: ±0.15	ANGULAR: ±3°	DESIGN: KEVIN	SCALE: NONE	UNIT: mm	THIRD ANGLE PROJECTION
.XX: ±0.25		CHECKED: KEVIN	TITLE: HDB 15P M TO HDB 15P F VGA CABLE		
.X: ±0.50		APPROVED:	PART NO.: MONGH3B	REV:A	
SIZE A4	DATE: 2023.02.04	SHEET NO.: 1 OF 1			

E

P1

D

C

B

A

E

P2

D

C

B

A

7

6

5

4

3

2

1