

NOTE:

1. Electrical test:

- (1). 100% open short & miss wire test;
- (2). Insulation resistance: DC300V 10M ohm;
- (3). Conductor resistance: * ohm/M;
- (4). Dielectric strength: 200V AC/Sec, 1mA.


2. RoHS COMPLIANT

3. Fluke Cat6A Channel Link Pass

	Grey	Blue	Green	Red	Black	White	Yellow
0.25m	MC-SFTP6A0025	MC-SFTP6A0025B	MC-SFTP6A0025G	MC-SFTP6A0025R	MC-SFTP6A0025S	MC-SFTP6A0025W	MC-SFTP6A0025Y
0.5m	MC-SFTP6A005	MC-SFTP6A005B	MC-SFTP6A005G	MC-SFTP6A005R	MC-SFTP6A005S	MC-SFTP6A005W	MC-SFTP6A005Y
1.0m	MC-SFTP6A01	MC-SFTP6A01B	MC-SFTP6A01G	MC-SFTP6A01R	MC-SFTP6A01S	MC-SFTP6A01W	MC-SFTP6A01Y
1.5m	MC-SFTP6A015	MC-SFTP6A015B	MC-SFTP6A015G	MC-SFTP6A015R	MC-SFTP6A015S	MC-SFTP6A015W	MC-SFTP6A015Y
2.0m	MC-SFTP6A02	MC-SFTP6A02B	MC-SFTP6A02G	MC-SFTP6A02R	MC-SFTP6A02S	MC-SFTP6A02W	MC-SFTP6A02Y
3.0m	MC-SFTP6A03	MC-SFTP6A03B	MC-SFTP6A03G	MC-SFTP6A03R	MC-SFTP6A03S	MC-SFTP6A03W	MC-SFTP6A03Y
5.0m	MC-SFTP6A05	MC-SFTP6A05B	MC-SFTP6A05G	MC-SFTP6A05R	MC-SFTP6A05S	MC-SFTP6A05W	MC-SFTP6A05Y
7.5m	MC-SFTP6A075	MC-SFTP6A075B	MC-SFTP6A075G	MC-SFTP6A075R	MC-SFTP6A075S	MC-SFTP6A075W	MC-SFTP6A075Y
10m	MC-SFTP6A10	MC-SFTP6A10B	MC-SFTP6A10G	MC-SFTP6A10R	MC-SFTP6A10S	MC-SFTP6A10W	MC-SFTP6A10Y
15m	MC-SFTP6A15	MC-SFTP6A15B	MC-SFTP6A15G	MC-SFTP6A15R	MC-SFTP6A15S	MC-SFTP6A15W	MC-SFTP6A15Y
20m	MC-SFTP6A20	MC-SFTP6A20B	MC-SFTP6A20G	MC-SFTP6A20R	MC-SFTP6A20S	MC-SFTP6A20W	MC-SFTP6A20Y
30m	MC-SFTP6A30						


CN1 (568B)


CN2 (568B)

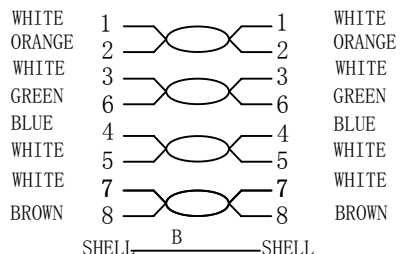

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK
③	CABLE	S-FTP (7/0.15BC*1P+AL)*4+B(16/4/0.12A1-Mg), LOSH, OD=6.0±0.2MM	1	
②	OVER MOLD	PVC 75	2	
①	CONNECTOR	Cat6 8P8C, Pin FU Gold plated, Steel housing Nickel plated	2	



DRAW NO.	PRODUCT NAME	Cat6A S-FTP Patch cable, LOSH		
CUSTOMER	VIEW	Tolerance		
ITEM NO.		X. ±1.00		
APPOBY		CHECKBY	DRAWNBY	UNTT
				MM
				Page 1 of 1