


REV	MODIFICATION	DATE
A	ISSUE	2022.04.10

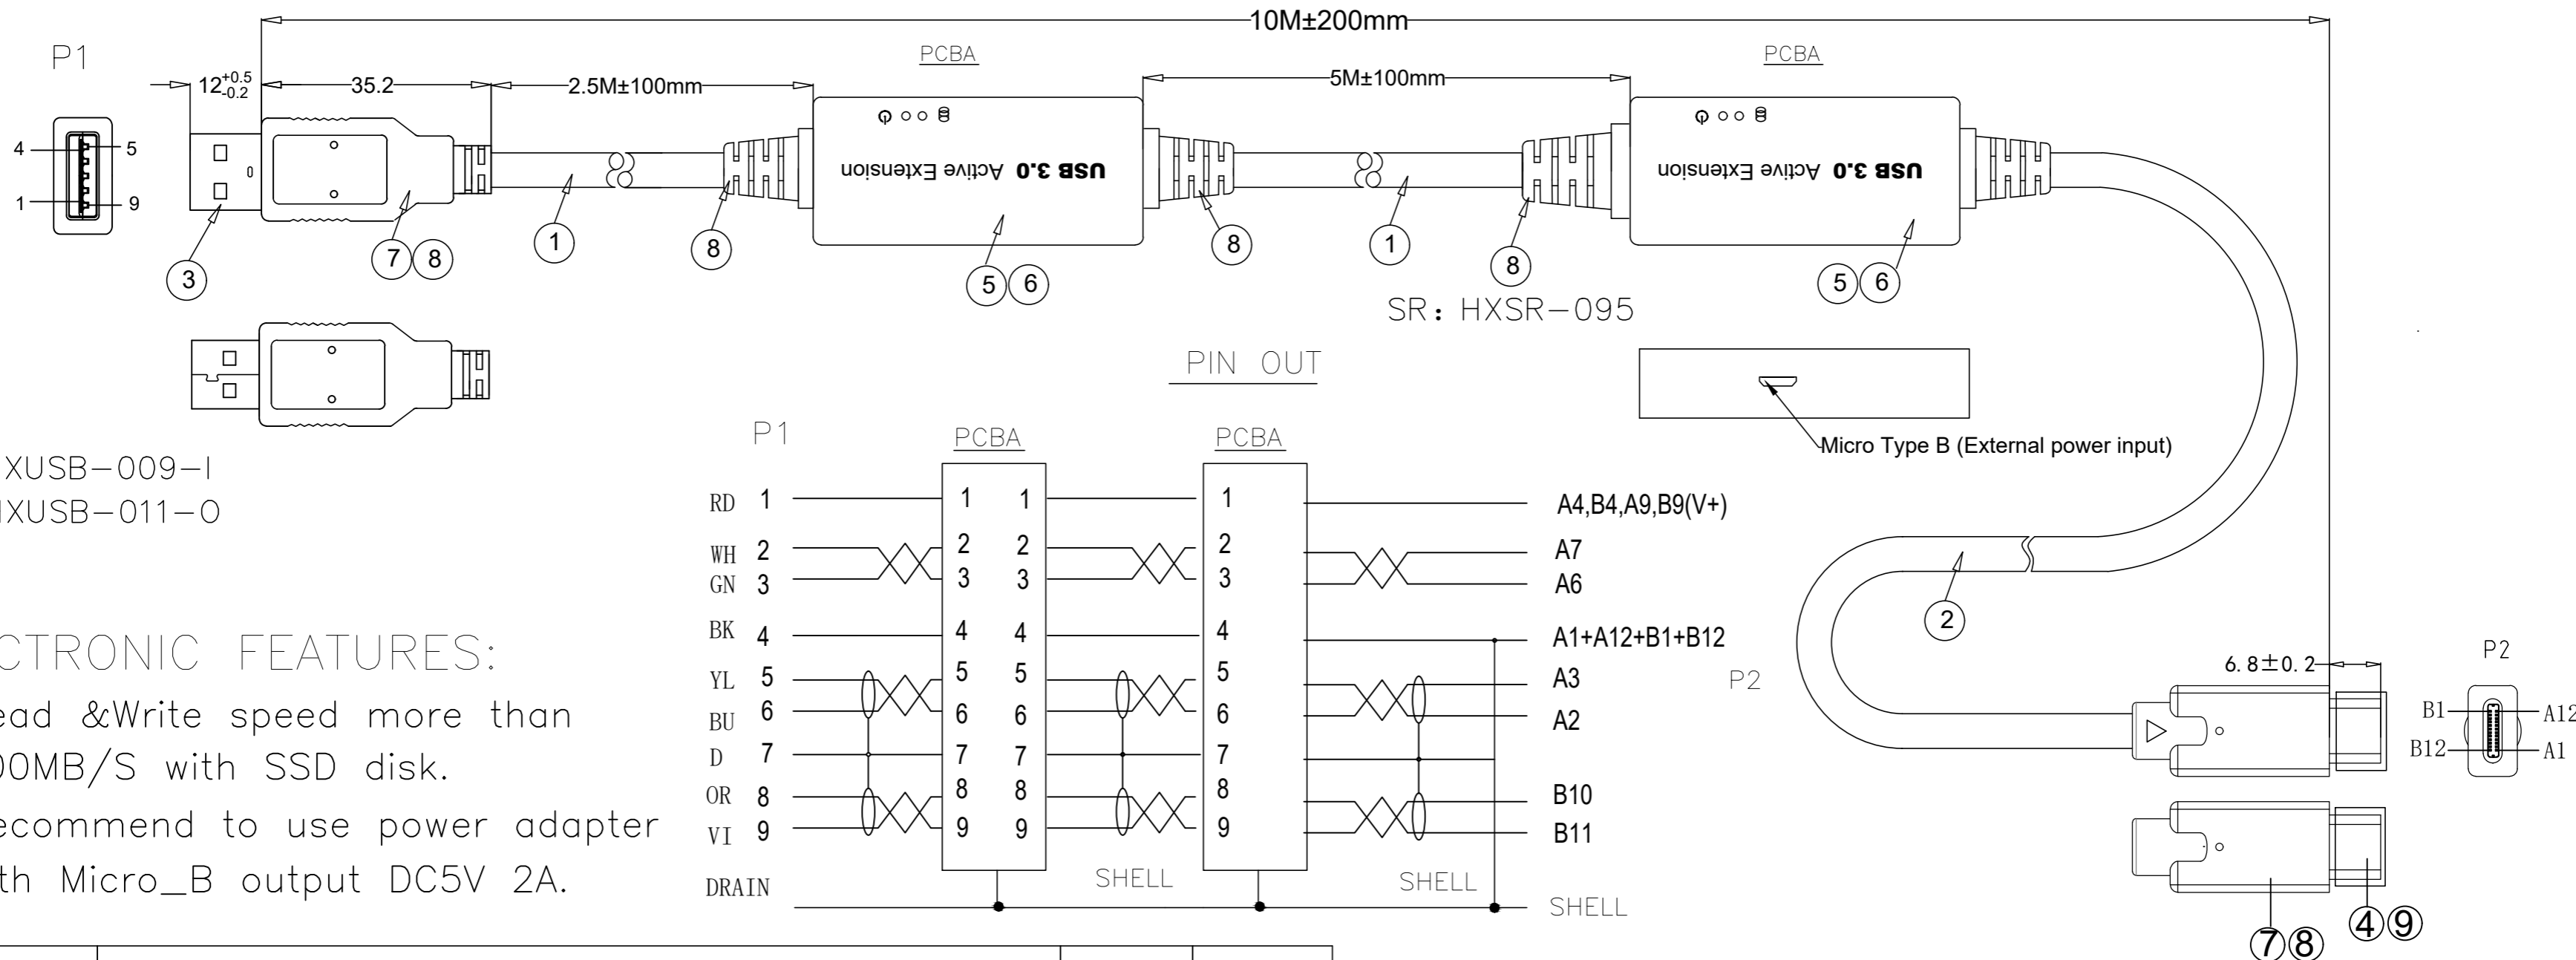

IM: HXUSB-009-I
 OM: HXUSB-011-O

ELECTRONIC FEATURES:

- A. Read & Write speed more than 300MB/S with SSD disk.
- B. Recommend to use power adapter with Micro_B output DC5V 2A.

	P1	PCBA	PCBA	
RD	1	1	1	A4, B4, A9, B9 (V+)
WH	2	2	2	A7
GN	3	3	3	A6
BK	4	4	4	A1+A12+B1+B12
YL	5	5	5	A3
BU	6	6	6	A2
D	7	7	7	B10
OR	8	8	8	B11
VI	9	9	9	
DRAIN				SHELL

NO	NAME	SPECIFICATIONS	Q'TY	UNIT
⑨	DUST CAP	TYPEC MALE DUST CAP	16	G
⑧	MOLDED	45P BLACK PVC	16	G
⑦	MOLDED	LD-PE	3	G
⑥	SHELL	Black ABS Hood	2	PCS
⑤	PCBA	USB3.0 PCBA (VL211)	2	PCS
④	CONN.2	TYPEC A MALE Shell Nickel Plated Pin Gold Plated UP Pull 56K	1	PCS
③	CONN.1	USB 3.0 A Male:Blue Insulation Core PIN Gold Plated Shell Nickel Plated	1	PCS
②	CABLE	[30#(7/0.10TC)*1P+D(7/0.10TC)+ALMY]*2P+24#(7/0.2TC)*2C+30#(7/0.1TC)*1P+AL+D(1/0.254BC)+ B(64/0.12LMS) Black PVC Jacket OD:4.5±0.2MM	2.5	M
①	CABLE	[(7/0.127TC)*1P+D7/0.10TC+AL+MYALR]*2C+7/0.127TC*1P+7/0.20*2C+AL -FOIL+D(1/0.32BC)+B(96/0.12LMS)]Black PVC JACKET,OD;5.5 Marking: HIGH SPEED USB 3.0 CABLE	7.5	M

PROJ:		TOLERANCE:	XX= XXX=
SCALE:	NONE	REV:	A
UNIT:	MM	SHEET:	1/2
SUST APPROVED:	Emil Olsen		
APPROVED:	YUCHENGSHI		
CHECKED:	2022.04.10		
DRAWING:	2022.04.10		

PROUCT NAME:
 PART NO:
 CUST: