


RoHS compliant

REV	MODIFICATION	DATE
C	DP-MMG-180MB	2017.11.0

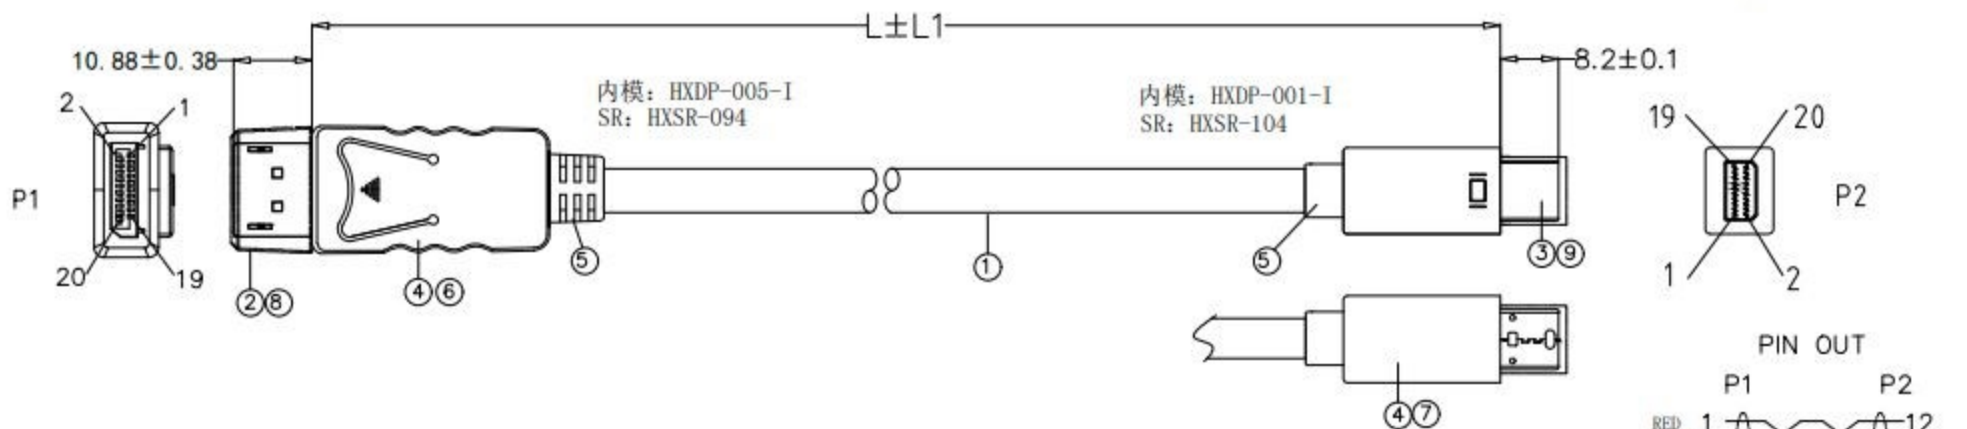

PIN OUT

	P1	P2
RED	1	12
WHITE	3	10
GND	2	8
BROWN	4	17
WHITE	6	15
GND	5	13
BLUE	7	11
WHITE	9	9
GND	8	7
GREEN	10	5
WHITE	12	3
GND	11	1
RED	13	4
GREEN	14	6
BLACK	15	16
WHITE	17	18
GND	16	14
PURPLE	18	2
WHITE	19	19
SHELL	Ground	SHELL

**ELECTRONIC TEST:**

- A.OPEN/SHORT/INTERMITTENCE: 100%.
  - B.HI-POT: AC 150V 0.01S
  - C.INSULATION RESISTANCE:DC300V 0.01S 10MΩ(MIN)
  - D.CONDUCTIVE RESISTANCE:5 OHM (MAX)
- 0.2m-2m resolution support 4K\*2K@60HZ;  
3m resolution support 4K\*2K@30HZ.

DUST CAP	MINI DISPLAYPORT MALE LDPE DUST CAP	1	PCS
DUST CAP	DISPLAYPORT MALE LDPE DUST CAP	1	PCS
OUTER COVER	MINI DP MALE ABS BLACK PLASTIC HOOD	1	PCS
OUTER COVER	DP MALE WITH LATCH ABS BLACK PLASTIC SHELL	1	PCS
MOLDED	45P BLACK PVC	6	G
MOLDED	LDPE	3	G
CONNECTOR	MINI DISPLAYPORT 20PIN MALE WHITE INSULATION FRAME, PIN GOLD PLATED, SHELL GOLD PLATED	1	PCS
CONNECTOR	DISPLAYPORT 20PIN MALE WITH LATCH, BLACK INSULATION FRAME, PIN GOLD PLATED, SHELL GOLD PLATED	1	PCS
CABLE	[32#(7/0.08TC)*1P+(7/0.08TC)+FAM]*5+(7/0.08TC)*5C+AL-FOIL+DRAIN WIRE (1/0.254BC)+BRAID(80/0.12AL-MG) BLACK PVC JACKET, OD :4.8±0.2MM, MARKING:DisplayPort Cable E***** 兄 AWM STYLE 20276 80°C 30V VW-1	L	MM
NAME	SPECIFICATIONS	Q'TY	UNIT

角法	⊕	容忍公差	XX=XXX	产品名称	
PROJ:		TOLERANCE:		PRODUCT NAME:	
比例	NONE	版本	C	产品料号	DP-MMG-180MB
SCALE:		REV:		PART NO:	
单位	MM	页次	1/2	客户	
UNIT:		SHEET:		CUST:	
客户回签					
SUST APPROVED:					
核准					
APPROVED:					
审核					
CHECKED:					
制图	QIUCAIMIAO				
DRAWING:	2015.08.10				

