

GCL1808KITU

8-Port LCD Combo KVM Switch with USB KVM Cables



IOGEAR's GCL1808KITU is an integrated LCD console and 8 port KVM (keyboard, video, and mouse) switch with bundled USB KVM cables that offers secure access to 8 VGA, USB computers. It features a convenient rack mountable sliding / retractable 17" TFT LCD active matrix monitor and keyboard with built-in touchpad for a space-saving and streamlined integration. For added convenience it also supports an external USB mouse. An extra USB / PS/2 console port is provided on the rear panel to manage the LCD KVM switch from an external console (monitor, keyboard, and mouse). All this in a universal 1U rack mount space.

The GCL1808KITU supports both PS/2 and USB keyboards and mice for the connected computers, and the GCL1808KITU supports USB** peripheral devices to be used for system upgrades with the attached computers. A single GCL1808KITU can control up to 8 computers. As many as 8 additional compatible KVM switches can be cascaded to reach up to 128 computers* controlled from a single keyboard, monitor, and mouse console with easy computer switching via front LED pushbuttons, OSD, and hotkeys.


- Integrated 8-port KVM console featuring a 17" TFT LCD active matrix monitor, keyboard and touchpad
- 1280 x 1024 resolution on 17" rack mount LCD provides a sharp video display
- Equipped with 8 USB KVM Cables
- Adjustable depth to fit different sizes of racks
- Auto Scan Mode to monitor connected computers
- Broadcast Mode to send commands to all connected computers
- Multi platform OS support - Windows®, Mac, Sun Solaris™, and Linux®
- Easy to operate - computer selection via front panel pushbutton LED's, intuitive OSD (on screen display), and hotkeys
- External USB mouse port for convenience
- External USB or PS/2 with VGA Console port
- USB media port support for attached USB computers (system upgrades, etc)**
- Cascade up to 2 levels - control up to 128 computers from a single console*
- Security - 2 level password protection for OSD
- DDC Emulation - Video settings of each computer are automatically adjusted for optimal output to the monitor
- Rack mountable in a 19" (1U) system rack
- Custom ASIC provides an auto-sensing function that recognizes the position of each station on the installation
- Fully Supports DDC2B
- Firmware Upgradable

*Cascade with IOGEAR 8/16-Port VGA Combo KVM Switch (Model No. GCS1808 and GCS1716)

**Only systems connected with the USB KVM cables will be able to access the front USB port for system upgrades and shared peripherals



How does it work?

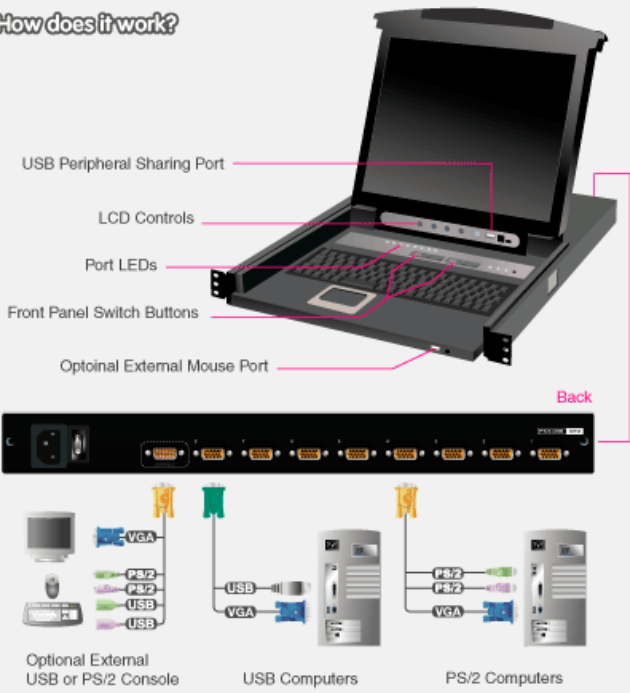

Requirements

Computers:

- VGA, SVGA, or MultiSync video graphics card with an HDB-15 port
- PS/2 mouse and keyboard ports (6-pin mini DIN) or 1 USB port

Package Contents

- 1 x 8-Port LCD Combo KVM Switch
- 4 x USB KVM Cable (6ft - G2L5202U)
- 4 x USB KVM Cable (10ft - G2L5203U)
- 1 x PS/2 KVM Cable (6ft - G2L5202P)
- 1 x Console Cable
- 1 x Cascade Cable
- 1 x Firmware Upgrade Cable
- 1 x Grounding Wire
- 1 x Power Cord
- 1 x Installation Guide
- 1 x Warranty Card

Specifications

Function	GCL1808KITU
Computer Connections	
Direct	8
Daisy Chain or Cascading	128
Port Selection	
OSD, Hotkeys, Pushbuttons	
Connectors	
Console	1 x SPHD-18 Male
Power	1 x 3-Prong AC Socket
Console Connectors	
Monitor	1 x HDB-15 Female
Keyboard	PS/2 or USB
Mouse	PS/2 or USB
Extra Mouse	1 x USB Type A Female
Flash ROM Upgrade	1 x RJ-11 Female
CPU Connectors	
Keyboard, Mouse, and Monitor	8 x SPHD-15 Female
Switches	
Reset	1 x Semi-recessed Pushbutton
Power	1 x Rocker Switch
F/W Upgrade	1 x Switch
LCD Adjustment	4 x Pushbutton
LCD Power	1 x LED Pushbutton (Orange)
Port Selection	4 x Pushbutton
LEDs	
On Line	8 (Orange)
Port ID	4 x 7 Segment LED Display (Yellow)
Power On	Dark Green
Emulation	
Keyboard	PS/2, USB
Mouse	PS/2, USB
Video Resolution	
1280 x 1024 @ 75Hz; DDC2B	
Scan Interval	
1-255 Seconds	
Power Input Rating	
Per AC Power Inlet, 50/60Hz	100~240VAC, 50/60Hz, 1A
Power Consumption	
120V, 28W	
Environment	
Operation Temperature	0~40°C
Storage Temperature	-20~60°C
Humidity	0~80% RH; Non-condensing
Housing	
Case	Metal and Plastic

Dimensions	GCL1808KITU
Unit Dimensions	
Width	19in.
Height	1.75in.
Depth	25in.
Unit Package Dimensions	
Width	30.25in.
Height	6.5in.
Depth	37.25in.
Weight	
Unit Pack Wt.	51.63lb
Unit Wt. w/accessories	36.67lb
Unit Wt.	27.78lb