


CAT5e U/UTP CCA

MicroConnect's CAT5e U/UTP CCA Ethernet cables feature copper-clad aluminum strands with 26 AWG, providing an affordable and efficient networking solution. These cables include strain relief and latch protection for a secure and reliable connection.

Designed without a foil shield, they are ideal for environments with minimal electromagnetic interference (EMI). With a variety of standards, lengths, and options available, MicroConnect offers the perfect CAT5e Ethernet cable for your networking needs.

- ▶ Latch protection
- ▶ Strain relief
- ▶ Gold plated RJ45 connectors

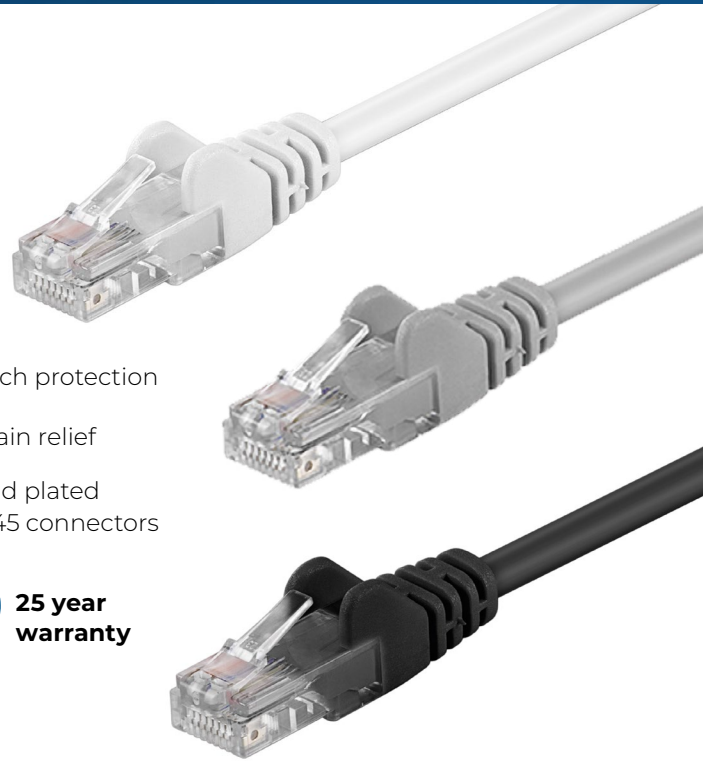

A wide selection of lengths and colors




LENGTH	WHITE	GREY	BLACK	BLUE	PURPLE	RED	ORANGE	YELLOW
0.25m	B-UTP50025W	B-UTP50025	B-UTP50025S	B-UTP50025B	B-UTP50025P	B-UTP50025R	B-UTP50025O	B-UTP50025Y
0.5m	B-UTP5005W	B-UTP5005	B-UTP5005S	B-UTP5005B	B-UTP5005P	B-UTP5005R	B-UTP5005O	B-UTP5005Y
1m	B-UTP501W	B-UTP501	B-UTP501S	B-UTP501B	B-UTP501P	B-UTP501R	B-UTP501O	B-UTP501Y
1.5m	B-UTP5015W	B-UTP5015	B-UTP5015S	B-UTP5015B	B-UTP5015P	B-UTP5015R	B-UTP5015O	B-UTP5015Y
2m	B-UTP502W	B-UTP502	B-UTP502S	B-UTP502B	B-UTP502P	B-UTP502R	B-UTP502O	B-UTP502Y
3m	B-UTP503W	B-UTP503	B-UTP503S	B-UTP503B	B-UTP503P	B-UTP503R	B-UTP503O	B-UTP503Y
5m	B-UTP505W	B-UTP505	B-UTP505S	B-UTP505B	B-UTP505P	B-UTP505R	B-UTP505O	B-UTP505Y
7.5m	B-UTP5075W	B-UTP5075	B-UTP5075S	B-UTP5075B	B-UTP5075P	B-UTP5075R	B-UTP5075O	-
10m	B-UTP510W	B-UTP510	B-UTP510S	B-UTP510B	B-UTP510P	B-UTP510R	B-UTP510O	B-UTP510Y
15m	B-UTP515W	B-UTP515	B-UTP515S	B-UTP515B	B-UTP515P	B-UTP515R	B-UTP515O	B-UTP515Y
20m	B-UTP520W	B-UTP520	B-UTP520S	B-UTP520B	B-UTP520P	B-UTP520R	B-UTP520O	B-UTP520Y



Try our
cable guide

Twisted Pair Network Cables

MicroConnect network cables always consists of eight strands twisted into four pairs. The twisting of these pairs, along with an electronically conductive shield, minimizes the likelihood of cross-talk between neighboring conductors within the cable. This design also enhances the cable's resilience to interference from external magnetic fields, which can be generated by nearby electrical cables.

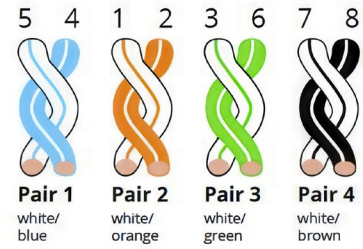


Jacket


MicroConnect offers three primary types of materials for network cable jackets: PVC (Polyvinyl Chloride), PE (Polyethylene), and LSZH, also known as LSOH (Low Smoke Zero Halogen). While PVC cables are softer, more flexible, and easier to handle, LSZH cables are firmer and less flexible due to their flame-retardant composition. The halogen-free jacket of LSZH cables does not emit dangerous gases, smoke, or acid in the event of a fire, making them increasingly essential in systems where protecting people and equipment from toxic and corrosive gases is critical. The PE jacket, on the other hand, is resistant to weathering and UV radiation, making it the preferred choice for outdoor cable systems.




U/UTP




F/UTP



SF/UTP



S/FTP

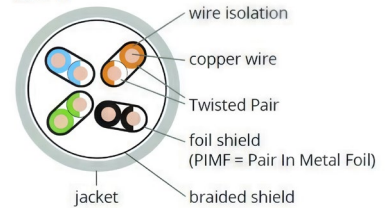

Shielding

There are two primary types of network cables: shielded and unshielded. Unshielded cables typically offer lower transmission quality, especially at high data rates or over long distances. In contrast, shielded cables, often called twisted pairs, are wrapped in a foil screen that protects against electromagnetic interference (EMI). Understanding a cable's shielding is straightforward once knowing the naming convention. The first letter before the slash (/) indicates the shielding of the outer cable jacket: U (unshielded), F (foil shielded), S (braided shield), or SF (braided and foil shielded). The letter after the slash denotes the shielding of the twisted pairs (TP): U (unshielded), F (foil shielded), or S (braided shielded). For example, a U/UTP cable means an unshielded outer jacket with unshielded twisted pairs.

Categories

Twisted pair network cables are categorized into different standards based on their performance, which can be seen in the illustration to the right.

CATEGORY	MAX. DATA RATE	BANDWITH	APPLICATION
CAT 5e	1 Gbps	100 MHz	1 GBase-T
CAT 6	1 Gbps	250 MHz	1 GBase-T, 155-MBit-ATM, 622-MBit-ATM
CAT 6a	10 Gbps	500 MHz	10 GBase-T
CAT 7	10 Gbps	600 MHz	10 GBase-T
CAT 81	25 Gbps	2000 MHz	25 GBase-T