


MPN: FIB2220005-4

# Optical Fibre Cable, SC-SC, Multimode, Duplex OM4 (Erica Violet), 0.5m

OM4 patch cords are used to connect high speed and legacy networks like 10/40/100 gigabit ethernet, fast ethernet and ethernet. This 50/125 OM4 multimode fiber optic cable is ideal for connecting 40G BIDI SR, 10G SR, QSFP+, SFP+ transceivers etc. for 10G/40G/100G Ethernet connections and is the preferred fiber specification for 40G/100G applications. Multimode patch cords are manufactured using LSZH cable and conform to Telcordia, EIA TIA or IEC standards.

- Designed for Data Centers, Industry and Computer Centers
- LSZH (Low Smoke Zero Halogen) and flame retardant
- RoHS compliant

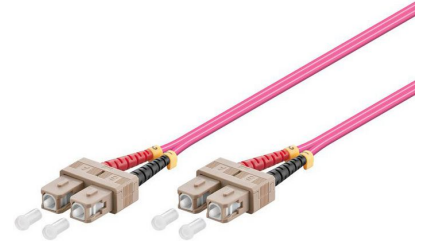

## Specifications

<b>Features</b>	<b>Cable length</b>	0.5 m
	<b>Cladding diameter</b>	125 µm
	<b>Connector 1</b>	SC/UPC
	<b>Connector 1 gender</b>	Male
	<b>Connector 2</b>	SC/UPC
	<b>Connector 2 gender</b>	Male
	<b>Core diameter</b>	50 µm
	<b>Fiber mode structure</b>	Multi-mode
	<b>Fibre optic type</b>	OM4
	<b>Full duplex</b>	Yes
	<b>Halogen-free</b>	Yes
	<b>Insertion loss</b>	0.3 dB
	<b>Jacket material</b>	Low smoke zero halogen (LSZH)
	<b>Product colour</b>	Violet
	<b>RoHS compliance</b>	Yes
<b>Operational conditions</b>	<b>Operating temperature (T-T)</b>	-40 - 85 °C
	<b>Storage temperature (T-T)</b>	-40 - 85 °C
<b>Package dimensions</b>	<b>Gross Weight (Package, kg)</b>	0.1 kg
<b>Product dimensions</b>	<b>Net Weight (Product, kg)</b>	0.09 kg
<b>Vendor information</b>	<b>Brand Name</b>	MicroConnect
	<b>Warranty</b>	25 Year(s)
<b>Weight &amp; dimensions</b>	<b>Cable diameter</b>	2 mm

## Other products in this series

Cable length	OM1	OM2	OM3	OM4
0.5	FIB2200005	FIB2220005-2	FIB2220005	FIB2220005-4
1.0	FIB220001	FIB222001-2	FIB222001	FIB222001-4
2.0	FIB220002	FIB222002-2	FIB222002	FIB222002-4
2.5				FIB2220025-4
3.0	FIB220003	FIB222003-2	FIB222003	FIB222003-4
4.0			FIB222004	
5.0	FIB220005	FIB222005-2	FIB222005	FIB222005-4
7.0	FIB220007	FIB222007-2	FIB222007	FIB222007-4
10.0	FIB220010	FIB222010-2	FIB222010	FIB222010-4
15.0	FIB220015	FIB222015-2	FIB222015	FIB222015-4
20.0	FIB220020	FIB222020-2	FIB222020	FIB222020-4
25.0	FIB220025	FIB222025-2	FIB222025	FIB222025-4

Cable length	OM5
0.5	FIB5710005
1.0	FIB571001
2.0	FIB571002
2.5	
3.0	FIB571003
4.0	
5.0	FIB571005
7.0	FIB571007
10.0	FIB571010
15.0	FIB571015
20.0	FIB571020
25.0	FIB571025