


**NOTE:**


- 1.Electrical properties:
  - 1.1 Tested by (quantum data)780E handhold test Instrument for HDMI2.0 480P, 720P , 1080P, 4K\*2K/60HZ 4:4:4 OR RGB
  - 1.2 Support HDR 4K\*2K 60HZ 4:2:2
  - 1.3 Support HDCP2.2,HDCP1.4
  - 1.4 IC:SCDH60V1,Level Shift
  - 1.5 DP1.4 IN HDMI2.0 OUT(4K\*2K 60HZ 4:4:4)  
DP1.2 IN HDMI1.4B OUT(4K\*2K 30HZ 4:4:4)
- 2.ROHS 2.0 and REACH compliant.
- 3.California Proposition 65 compliant

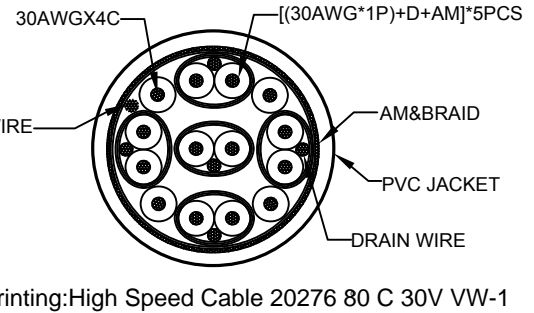

Printing:High Speed Cable 20276 80 C 30V VW-1

**MODEL LIST**

Model	Length	DSP
MC-DP-HDMI-0504K	500mm	4K60Hz 4:4:4 8bit
MC-DP-HDMI-1004K	1000mm	4K60Hz 4:4:4 8bit
MC-DP-HDMI-1504K	1500mm	4K60Hz 4:4:4 8bit
MC-DP-HDMI-2004K	2000mm	4K60Hz 4:4:4 8bit
MC-DP-HDMI-3004K	3000mm	4K60Hz 4:4:4 8bit
MC-DP-HDMI-5004K	5000mm	4K60Hz 4:4:4 8bit

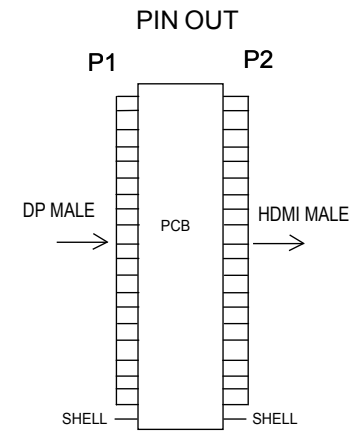

**MATERIAL LIST**

No.	PART NAME	DESCRIPTION	QTY						
⑥	DUST COVER	PE, COLOR: TRANSPARENT	2						
⑤	CABLE	(1/0.254B*1P+1C+AL+MY)*5C+1/0.254B*4C+ADB16/8/0.120AL+PVC OD:6.0±0.1MM COLOR:BLACK	L	MicroConnect					
④	OUTER MOLD	BLACK ABS	1	DRAW No.		NAME	DP1.4/M to HDMI2.0/M CABLE		
③	OUTER MOLD	BLACK PVC	1	CUSTOMER	EET Group A/S		MAPE	TOLERANCE	
②	CONNECTOR	HDMI MALE, GOLD PLATED PIN, GOLD PLATED SHELL	1	MODEL No.				X. ±1.00	X.X ±0.50
①	CONNECTOR	DP1.4 MALE ,RUBBER CORE:RED,GOLD PLATED PIN,GOLD PLATED SHELL	1	APPROVE BY	CHECK BY	DRAW BY	SCALE	MM	
				Emil Olsen			PAGE	1/1	